

### C281M/045045


Steel Recessed Access Cover, 450mm x 450mm clear opening, 80mm tray depth, 85mm frame depth, Loading code M



CLEAR OPENING	OVERALL TOP OF FRAME	FRAME DEPTH	LOAD DUTY
(MM)	(MM)	(MM)	
450 x 450	490 x 490	85	Light / medium duty

## **KEY FEATURES**

- ✓ Hot dipped galvanised for corrosion resistance.
- Keyway lifting points are provided on the frame for safe handling.

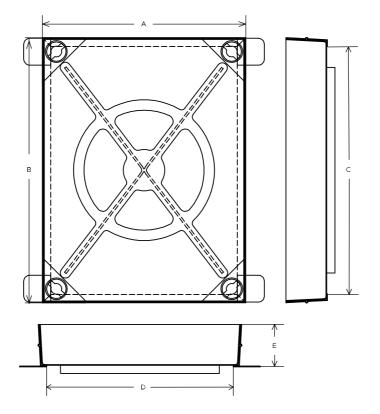



Tel: 01543 440 440

wrekinproducts.com



## **SPECIFICATION**

#### **General information**

Primary materialStelCategoryAccess coverFlanges4Gross laden vehicle weight10 tnLoad dutyLight / medium dutySlow moving wheel load (pneumatic tyres)2.5Standards, classes and groupingsXVrekin loading codeMFrame shapeRectangularfoverall top of frame (A x B)490 mm x 490 mmFrame depth (E)Simmer	Stock code	C281M/045045
Flanges4Flanges10 tnGross laden vehicle weight10 tnLoad dutyLight / medium dutySlow moving wheel load (pneumatic tyres)2.5Standards, classes and groupingsMWrekin loading codeMDimensionsRectangularFrame shapeRectangularOverall top of frame (A × B)490 mm × 490 mmClear opening (C × D)Top Mark	Primary material	Steel
FrangesIO tnLoad dutyLight / medium dutySlow moving wheel load (pneumatic tyres)2.5Standards, classes and groupingsMWrekin loading codeMDimensionsRectangularFrame shapeRectangularOverall top of frame (A x B)490 mm x 490 mmClear opening (C x D)Area	Category	Access cover
Load dutyLight / medium dutySlow moving wheel load (pneumatic tyres)2.5Standards, classes and groupingsVrekin loading codeWrekin loading codeMDimensionsStandardsFrame shapeRectangularOverall top of frame (A x B)490 mm x 490 mmClear opening (C x D)A	Flanges	4
Slow moving wheel load (pneumatic tyres)  2.5    Standards, classes and groupings	Gross laden vehicle weight	10 tn
Standards, classes and groupingsWrekin loading codeMDimensionsRectangularFrame shapeRectangularOverall top of frame (A x B)490 mm x 490 mmClear opening (C x D)450 mm x 450 mm	Load duty	Light / medium duty
Wrekin loading codeMDimensionsKFrame shapeRectangularOverall top of frame (A x B)A90 mm x 490 mmClear opening (C x D)A50 mm x 450 mm	Slow moving wheel load (pneumatic tyres)	2.5
Wrekin loading codeMDimensionsKFrame shapeRectangularOverall top of frame (A x B)A90 mm x 490 mmClear opening (C x D)A50 mm x 450 mm		
DimensionsFrame shapeRectangularOverall top of frame (A x B)490 mm x 490 mmClear opening (C x D)450 mm x 450 mm	Standards, classes and groupings	
Frame shapeRectangularOverall top of frame (A x B)490 mm x 490 mmClear opening (C x D)450 mm x 450 mm	Wrekin loading code	М
Frame shapeRectangularOverall top of frame (A x B)490 mm x 490 mmClear opening (C x D)450 mm x 450 mm		
Overall top of frame (A x B)490 mm x 490 mmClear opening (C x D)450 mm x 450 mm	Dimensions	
Clear opening (C x D)    450 mm x 450 mm	Frame shape	Rectangular
	Overall top of frame (A x B)	490 mm x 490 mm
Frame depth (E) 85mm	Clear opening (C x D)	450 mm x 450 mm
	Frame depth (E)	85mm

Base opening (F x G)

Overall base of frame

590 mm x 490 mm

# ACCESSORIES

STOCK CODE	DESCRIPTION
KEYSHEAVY	Large cover lifting keys with a standard handle (sold as a pair)



Tel: 01543 440 440

wrekinproducts.com

# 

# NOTES

Mild steel - Hot dip galvanised to BS EN ISO 1461

Lifting keys - Standard heavy-duty key (product code KEYSHEAVY)

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.

- 2. It is the responsibility of all users to satisfy themselves the above data is current.
- 3. Installation details are available on request.
- 4. All Wrekin products are supplied subject to our <u>Terms and Conditions of Sale</u>





Tel: 01543 440 440

wrekinproducts.com