

C281M/045045/SQR

Steel Recessed Access Cover, Square to round, 450mm diameter clear opening, 80mm tray depth, 85mm frame depth, Loading code M




CLEAR OPENING	OVERALL TOP OF FRAME	FRAME DEPTH	LOAD DUTY
(MM)	(MM)	(MM)	
450 🛛	490 x 490	85	Light / medium duty

KEY FEATURES

✓ Hot dipped galvanised for corrosion resistance.

Keyway lifting points are provided on the frame for safe handling.

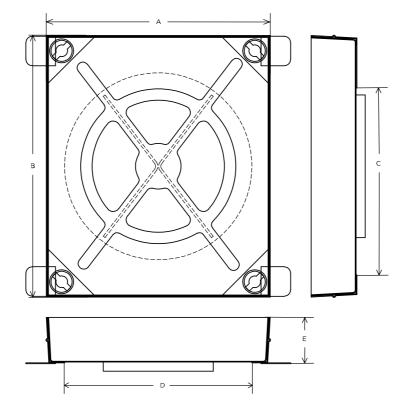



Tel: 01543 440 440

wrekinproducts.com



SPECIFICATION

General information

Stock code	C281M/045045/SQR
Primary material	Steel
Category	Access cover
Flanges	4
Gross laden vehicle weight	10 tn
Load duty	Light / medium duty
Slow moving wheel load (pneumatic tyres)	2.5

Standards, classes and groupings

Wrekin loading code	М
Dimensions	
Frame shape	Square
Manhole shape	Circular
Overall top of frame (A x B)	490 mm x 490 mm
Clear opening (C x D)	Ø 450 mm
Frame depth (E)	85mm
Base opening (F x G)	
Overall base of frame	590 mm x 490 mm



Tel: 01543 440 440

wrekinproducts.com



ACCESSORIES

STOCK CODE	DESCRIPTION
KEYSHEAVY	Large cover lifting keys with a standard handle (sold as a pair)

NOTES

Mild steel - Hot dip galvanised to BS EN ISO 1461

Lifting keys - Standard heavy-duty key (product code KEYSHEAVY)

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.

- 2. It is the responsibility of all users to satisfy themselves the above data is current.
- 3. Installation details are available on request.
- 4. All Wrekin products are supplied subject to our <u>Terms and Conditions of Sale</u>





Tel: 01543 440 440

wrekinproducts.com