

C281M/060045/LH

Steel Recessed Access Cover, 600mm x 450mm clear opening, 80mm tray depth, 85mm frame depth, Loading code M




CLEAR OPENING (MM)	OVERALL TOP OF FRAME (MM)	FRAME DEPTH (MM)	LOAD DUTY
600 x 450	640 x 490	85	Light / medium duty

KEY FEATURES

→ Hot dipped galvanised for corrosion resistance.

Keyway lifting points are provided on the frame for safe handling.

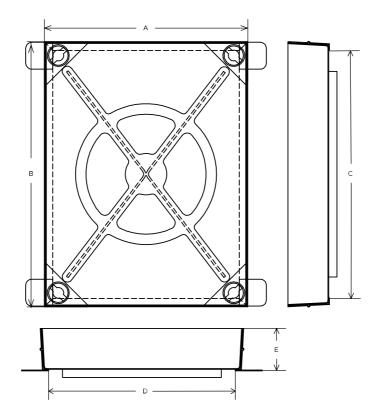





SPECIFICATION

General information

Stock code C281M/060045/LH

Primary material Steel

Category Access cover

Flanges

Gross laden vehicle weight 10 tn

Load duty Light / medium duty

Slow moving wheel load (pneumatic tyres) 2.5

Standards, classes and groupings

Wrekin loading code M

Dimensions

Frame shape Rectangular

Overall top of frame (A x B) 490 mm x 640 mm

Clear opening (C x D) 600 mm x 450 mm

Frame depth (E) 85mm

Base opening (F x G)

Overall base of frame 580 mm x 635 mm

ACCESSORIES

STOCK CODE	DESCRIPTION
KEYSHEAVY	Large cover lifting keys with a standard handle (sold as a pair)





NOTES

Mild steel - Hot dip galvanised to BS EN ISO 1461

Lifting keys - Standard heavy-duty key (product code KEYSHEAVY)

- 1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
- 2. It is the responsibility of all users to satisfy themselves the above data is current.
- 3. Installation details are available on request.
- 4. All Wrekin products are supplied subject to our <u>Terms and Conditions of Sale</u>







