

# C291M/075075

Steel Recessed Access Cover, 750mm x 750mm clear opening, 100mm tray depth, Loading code M




CLEAR OPENING (MM)	OVERALL TOP OF FRAME (MM)	FRAME DEPTH (MM)	LOAD DUTY
750 x 750	790 x 790	105	Light / medium duty

# **KEY FEATURES**

→ Hot dipped galvanised for corrosion resistance.

Keyway lifting points are provided on the frame for safe handling.

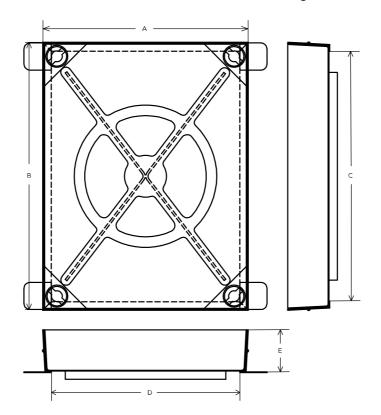





#### **SPECIFICATION**

#### **General information**

**Stock code** C291M/075075

Primary material Steel

**Category** Access cover

Flanges 4

Gross laden vehicle weight 10 tn

**Load duty** Light / medium duty

Slow moving wheel load (pneumatic tyres) 2.5

### Standards, classes and groupings

Wrekin loading code M

#### **Dimensions**

Frame shape Rectangular

Overall top of frame (A x B) 790 mm x 790 mm

Clear opening (C x D) 750 mm x 750 mm

Frame depth (E) 105mm

Base opening (F x G)

Overall base of frame 880 mm x 785 mm

## **ACCESSORIES**

STOCK CODE	DESCRIPTION
KEYSHEAVY	Large cover lifting keys with a standard handle (sold as a pair)





#### **NOTES**

Mild steel - Hot dip galvanised to BS EN ISO 1461

Lifting keys - Standard heavy-duty key (product code KEYSHEAVY)

- 1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
- 2. It is the responsibility of all users to satisfy themselves the above data is current.
- 3. Installation details are available on request.
- 4. All Wrekin products are supplied subject to our <u>Terms and Conditions of Sale</u>







