

C291M/090060

Steel Recessed Access Cover, 900mm x 600mm clear opening, 100mm tray depth, Loading code M




CLEAR OPENING (MM)	OVERALL TOP OF FRAME (MM)	FRAME DEPTH (MM)	LOAD DUTY
900 x 600	940 x 640	105	Light/medium duty

KEY FEATURES

→ Hot dipped galvanised for corrosion resistance.

Keyway lifting points are provided on the frame for safe handling.

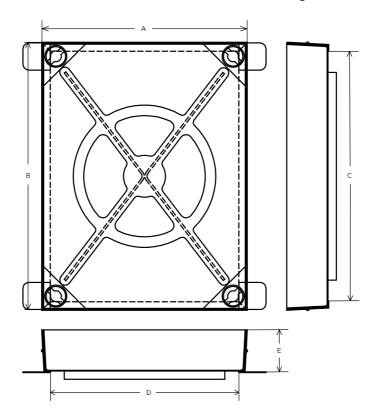





SPECIFICATION

General information

Stock code C291M/090060

Primary material Steel

Category Access cover

Flanges 4

Gross laden vehicle weight 10 tn

Load duty Light / medium duty

Slow moving wheel load (pneumatic tyres) 2.5

Standards, classes and groupings

Wrekin loading code M

Dimensions

Frame shape Rectangular

Overall top of frame (A x B) 640 mm x 940 mm

Clear opening (C x D) 900 mm x 600 mm

Frame depth (E) 105mm

Base opening (F x G)

Overall base of frame 740 mm x 940 mm

ACCESSORIES

STOCK CODE	DESCRIPTION
KEYSHEAVY	Large cover lifting keys with a standard handle (sold as a pair)





NOTES

Mild steel - Hot dip galvanised to BS EN ISO 1461

Lifting keys - Standard heavy-duty key (product code KEYSHEAVY)

- 1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
- 2. It is the responsibility of all users to satisfy themselves the above data is current.
- 3. Installation details are available on request.
- 4. All Wrekin products are supplied subject to our <u>Terms and Conditions of Sale</u>







