


FasTrack 1800 (discontinued)

FasTrack 1800 Woven Geotextile, 1900N, 85g/m² - 4.5m x 100m roll

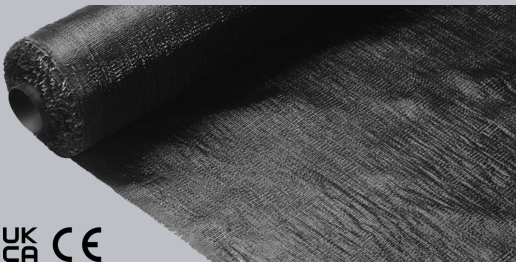

DESCRIPTION
FasTrack 1800 Woven Geotextile, 1900N, 85g/m ² - 4.5m x 100m roll

SUPERSEDED BY

STOCK CODE	DESCRIPTION
GTSG/FASTRACK/609	FasTrack 609 Woven Geotextile, 1500N, 75g/m ² - 4.5m x 100m roll (mini packs and folded rolls also available)

SPECIFICATION

General information

Stock code	GTSG/FASTRACK/1800
Range	FasTrack
Third party certified	UKCA CE
Roll sizes	4.5m x 100m
Geotextile product range	FasTrack

Geotextile properties

Material		Polypropylene
Tensile strength (MD)	EN ISO 10319	18kN/m
Tensile strength (CMD)	EN ISO 10319	12kN/m
Elongation at max load (MD)	EN ISO 10319	25%
Elongation at max load (CMD)	EN ISO 10319	25%
Dynamic perforation resistance	EN ISO 13433	18mm
CBR puncture resistance	EN ISO 12236	1900N
Dynamic cone drop	EN ISO 13433	18mm
Water permeability	EN ISO 11058	18L/m ² .s
Characteristic opening size	EN ISO 12956	200µm
Weight	EN ISO 9864	85g/m ²

1. Geoworks (trading as Wrekin Products Ltd.) continually seeks to improve its products and, therefore, reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available in the [knowledge base](#).
4. All Geoworks products are supplied subject to our [Terms and Conditions of Sale](#).

