


DMS0B2/9791/KGSF

JB4A




RANGE	CLEAR OPENING (MM)	OVERALL FRAME (MM)	FRAME DEPTH (MM)	OPTIONS
	915 x 975	1,195 x 1,170	50	D and comms badging

FEATURES

70+ PSRV tested at top surface of chequer by UKAS accredited 3rd party.

Screw locking

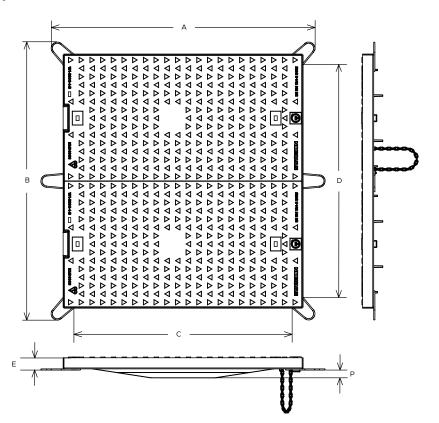





SPECIFICATION

General information

Stock code DMS0B2/9791/KGSF

Primary material Ductile iron

Category Manhole cover

Flanges

Standards, classes and groupings

Standards BS EN 124-2

BS EN 124 Class B125

BS EN 124 Group 2

Third party certified Kitemark

Dimensions

Frame shape Rectangular

Overall frame (A x B) 1,195 mm x 1,170 mm

Clear opening (C x D) 915 mm x 975 mm

Frame depth (E) 50mm

Base opening (F x G) 915 mm x 975 mm

AVAILABLE OPTIONS

✓ ID badging and communications options

Bespoke badging and communications antennae, including NFC, RFID and IoT technology.





NOTES

All values stated are nominal within 2.5% tolerance.

- 1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
- 2. It is the responsibility of all users to satisfy themselves the above data is current.
- 3. Installation details are available on request.
- 4. All Wrekin products are supplied subject to our <u>Terms and Conditions of Sale</u>







