


**C271M/030030**


Steel Recessed Access Cover, double seal and locked, 300mm x 300mm clear opening, 38mm frame depth, 58mm frame depth, Loading code M



CLEAR OPENING (MM)	OVERALL TOP OF FRAME (MM)	FRAME DEPTH (MM)	LOAD DUTY
300 x 300	385 x 385	58	Light / medium duty

**FEATURES**

✓ Hot dipped galvanised for corrosion resistance.

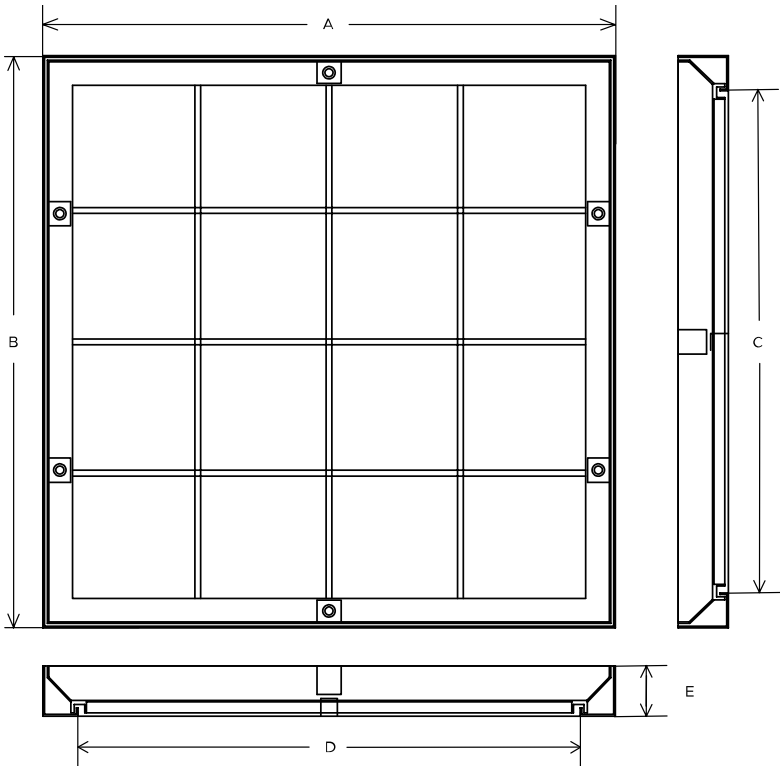

## SPECIFICATION

### General information

Stock code	C271M/030030
Primary material	Steel
Category	Access cover
Flanges	4
Gross laden vehicle weight	10 tn
Load duty	Light / medium duty
Slow moving wheel load (pneumatic tyres)	2.5
Seal type	Double seal

### Standards, classes and groupings

Wrekin loading code	M
---------------------	---

### Dimensions

Frame shape	Rectangular
Overall frame (A x B)	
Overall top of frame (A x B)	385 mm x 385 mm
Clear opening (C x D)	300 mm x 300 mm
Frame depth (E)	58mm
Base opening (F x G)	
Overall base of frame	380 mm x 380 mm

## ACCESSORIES

STOCK CODE	DESCRIPTION
KEYSRECESSED	Recessed cover lifting keys (sold as a pair)

## NOTES

Full loading capability is achieved when fully filled with grade C25 concrete

Mild steel - Galvanised to BS EN ISO 1461

Locking screws - Countersunk, slotted, M8 x 45 mm long

Unlocking - Flathead screwdriver

Lifting keys - Wire J-shaped key (Wrekin product code KEYSRECESSED)

The vertical top edge of the cover will accept up to a 12 mm tile

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available on request.
4. All Wrekin products are supplied subject to our [Terms and Conditions of Sale](#)

