



C271M/045045

Steel Recessed Access Cover, double seal and locked, 450mm x 450mm clear opening, 58mm tray depth, Loading code M



CHARACTERISTIC	VALUE
Clear opening (mm)	450 x 450
Overall top of frame (mm)	535 x 535
Frame depth (mm)	58
Load duty	Light / medium duty

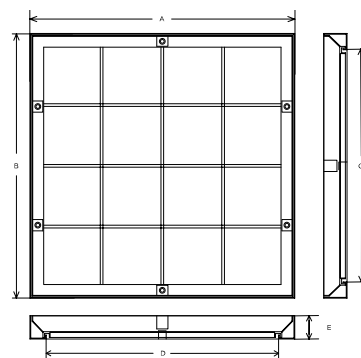

SPECIFICATION

GENERAL INFORMATION

Stock code	C271M/045045
Primary material	Steel
Category	Access cover
Flanges	4
Gross laden vehicle weight	10 tn
Load duty	Light / medium duty
Slow moving wheel load (pneumatic tyres)	2.5
Seal type	Double seal

STANDARDS, CLASSES AND GROUPINGS

Wrekin loading code	M
---------------------	---

DIMENSIONS

Frame shape	Rectangular
Overall top of frame (A x B)	535 mm x 535 mm
Clear opening (C x D)	450 mm x 450 mm
Frame depth (E)	58mm

FEATURES

- ✓ Hot dipped galvanised for corrosion resistance.

ACCESSORIES

Tel: 01543 440 440
Fax: 01543 440 444
info@wrekinproducts.com
wrekinproducts.com



STOCK CODE	DESCRIPTION
KEYSRECESSED	Recessed cover lifting keys (sold as a pair)

NOTES

Full loading capability is achieved when fully filled with grade C25 concrete

Mild steel - Galvanised to BS EN ISO 1461

Locking screws - Countersunk, slotted, M8 x 45 mm long

Unlocking - Flathead screwdriver

Lifting keys - Wire J-shaped key (Wrekin product code KEYSRECESSED)

The vertical top edge of the cover will accept up to a 12 mm tile

- ▶ Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
- ▶ It is the responsibility of all users to satisfy themselves the above data is current.
- ▶ All values stated are nominal within 2.5% tolerance.
- ▶ Installation details are available in the [knowledge base](#).
- ▶ All Wrekin products are supplied subject to our [Terms and Conditions of Sale](#).