


C271M/075060


Steel Recessed Access Cover, double seal and locked, 750mm x 600mm clear opening, 42mm tray depth, 58mm frame depth, Loading code M



CLEAR OPENING (MM)	OVERALL TOP OF FRAME (MM)	FRAME DEPTH (MM)	LOAD DUTY
750 x 600	835 x 685	58	Light / medium duty

FEATURES

✓ Hot dipped galvanised for corrosion resistance.

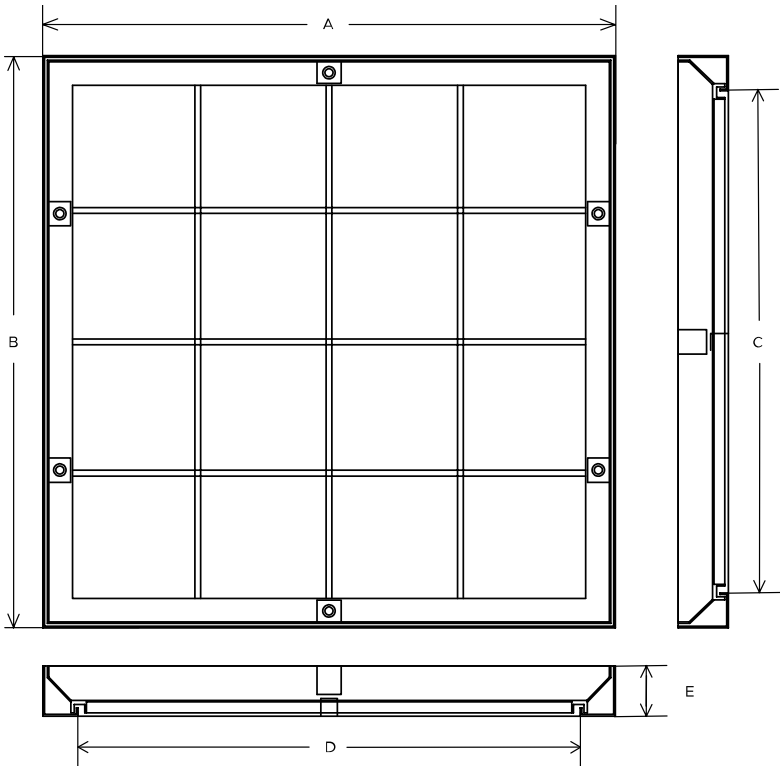

SPECIFICATION

General information

Stock code	C271M/075060
Primary material	Steel
Category	Access cover
Flanges	4
Gross laden vehicle weight	10 tn
Load duty	Light / medium duty
Slow moving wheel load (pneumatic tyres)	2.5
Seal type	Double seal

Standards, classes and groupings

Wrekin loading code	M
---------------------	---

Dimensions

Frame shape	Rectangular
Overall frame (A x B)	
Overall top of frame (A x B)	685 mm x 835 mm
Clear opening (C x D)	750 mm x 600 mm
Frame depth (E)	58mm
Base opening (F x G)	

ACCESSORIES

STOCK CODE	DESCRIPTION
KEYSRECESSED	Recessed cover lifting keys (sold as a pair)

NOTES

Full loading capability is achieved when fully filled with grade C25 concrete

Mild steel - Galvanised to BS EN ISO 1461

Locking screws - Countersunk, slotted, M8 x 45 mm long

Unlocking - Flathead screwdriver

Lifting keys - Wire J-shaped key (Wrekin product code KEYSRECESSED)

The vertical top edge of the cover will accept up to a 12 mm tile

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available on request.
4. All Wrekin products are supplied subject to our [Terms and Conditions of Sale](#)

