

C281M/030030

Steel Recessed Access Cover, 300mm x 300mm clear opening, 80mm tray depth, 85mm frame depth, Loading code M




CLEAR OPENING (MM)	OVERALL TOP OF FRAME (MM)	FRAME DEPTH (MM)	LOAD DUTY
300 x 300	340 x 340	85	Light / medium duty

FEATURES

→ Hot dipped galvanised for corrosion resistance.

Keyway lifting points are provided on the frame for safe handling.

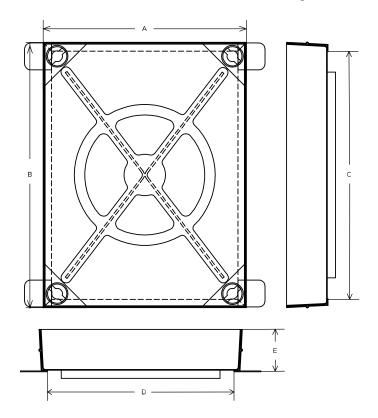





SPECIFICATION

General information

Stock code C281M/030030

Primary material Steel

Category Access cover

Flanges

Gross laden vehicle weight 10 tn

Load duty Light / medium duty

Slow moving wheel load (pneumatic tyres) 2.5

Standards, classes and groupings

Wrekin loading code M

Dimensions

Frame shape Rectangular

Overall top of frame (A x B) 340 mm x 340 mm

Clear opening (C x D) 300 mm x 300 mm

Frame depth (E) 85mm

Overall base of frame 440 mm x 340 mm

NOTES

Mild steel - Hot dip galvanised to BS EN ISO 1461

Lifting keys - Standard heavy-duty key (product code KEYSHEAVY)





- 1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
- 2. It is the responsibility of all users to satisfy themselves the above data is current.
- 3. Installation details are available in the $\underline{\text{knowledge base}}$.
- 4. All Wrekin products are supplied subject to our <u>Terms and Conditions of Sale</u>







