

C281M/045045/SQR


Steel Recessed Access Cover, Square to round, 450mm diameter clear opening, 80mm tray depth, 85mm frame depth, Loading code M



| CLEAR OPENING (MM) | OVERALL TOP OF FRAME (MM) | FRAME DEPTH (MM) | LOAD DUTY |
|-----------------------|------------------------------|---------------------|---------------------|
| 450 ø | 490 x 490 | 85 | Light / medium duty |

FEATURES

- ✓ Hot dipped galvanised for corrosion resistance.
- ✓ Keyway lifting points are provided on the frame for safe handling.

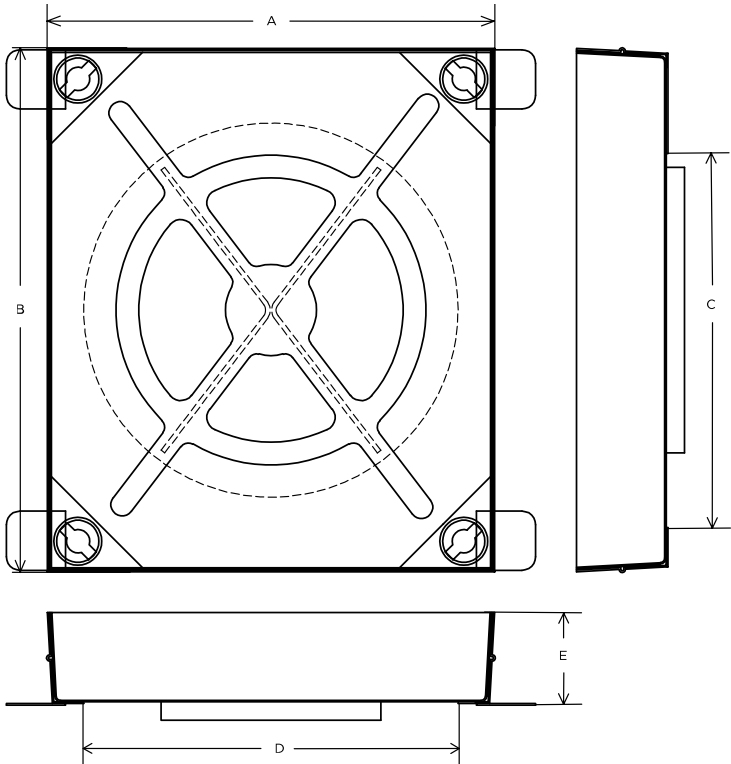

SPECIFICATION

General information

| | |
|--|---------------------|
| Stock code | C281M/045045/SQR |
| Primary material | Steel |
| Category | Access cover |
| Flanges | 4 |
| Gross laden vehicle weight | 10 tn |
| Load duty | Light / medium duty |
| Slow moving wheel load (pneumatic tyres) | 2.5 |

Standards, classes and groupings

| | |
|---------------------|---|
| Wrekin loading code | M |
|---------------------|---|

Dimensions

| | |
|------------------------------|-----------------|
| Frame shape | Square |
| Manhole shape | Circular |
| Overall top of frame (A x B) | 490 mm x 490 mm |
| Clear opening (C x D) | Ø 450 mm |
| Frame depth (E) | 85mm |
| Overall base of frame | 590 mm x 490 mm |

NOTES

Mild steel - Hot dip galvanised to BS EN ISO 1461

Lifting keys - Standard heavy-duty key (product code KEYSHEAVY)

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available in the [knowledge base](#).
4. All Wrekin products are supplied subject to our [Terms and Conditions of Sale](#)

