

## DGHOB3/2222

Tristar B125 3 flange dished gully grate 225mm x 225mm clear opening with 65mm frame depth



CHARACTERISTIC	VALUE
Range	Tristar
Clear opening (mm)	225 x 225
Base opening (mm)	225 x 225
Overall frame (mm)	280 x 265
Frame depth (mm)	65
Waterway area (cm <sup>2</sup> )	210
Options	► Screw locking


## SPECIFICATION

### GENERAL INFORMATION

Stock code	DGHOB3/2222
Primary material	Ductile iron
Range	Tristar
Category	Gully grate
Flanges	3

### STANDARDS, CLASSES AND GROUPINGS

Standards	BS EN 124-2
BS EN 124 Class	B125
BS EN 124 Group	2
Third party certified	Kitemark
CD 526 hydraulic capacity	Out of Range

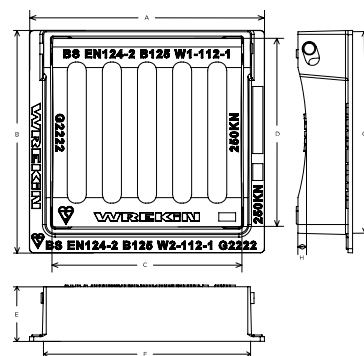

### DIMENSIONS

Frame shape	Rectangular
Manhole shape	Rectangular
Overall frame (A x B)	280 mm x 265 mm
Clear opening (C x D)	225 mm x 225 mm
Frame depth (E)	65mm
Base opening (F x G)	225 mm x 225 mm
Dished depth (H)	10mm
Waterway area	210cm <sup>2</sup>

### EPD DATA

Total life cycle (cradle to grave)	18.79 kg CO <sub>2</sub> equivalent
------------------------------------	-------------------------------------



Help us improve

## FEATURES

- ✓ Captive hinges reduce theft risk whilst allowing easy lifting.

## AVAILABLE OPTIONS

- ✓ **Screw locking**  
Screw locking deters unauthorised access to the chamber.  
An extended shank socket set is required to engage the locking screw.

## ACCESSORIES

STOCK CODE	DESCRIPTION
PC/UNIFORM/151076	Uniform chamber adjustment unit 760mm x 100mm x 15mm
PC/UNIFORM/251076	Uniform chamber adjustment unit 760mm x 100mm x 25mm
PC/UNIWEDGE/755012	Uniform support wedge 120mm x 50mm x 75mm
YPCR/U12.5	12.5Kg Unipak <sup>®</sup> rapid curing polyester resin mortar
YPCR/U25	25Kg Unipak <sup>®</sup> rapid curing polyester resin mortar

## NOTES

- ▶ This product has a dished gully top arrangement
- ▶ Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
- ▶ It is the responsibility of all users to satisfy themselves the above data is current.
- ▶ All values stated are nominal within 2.5% tolerance.
- ▶ Installation details are available in the [knowledge base](#).
- ▶ All Wrekin products are supplied subject to our [Terms and Conditions of Sale](#).

