


DGHOB3/3030

Tristar B125 3 flange dished gully grate 300mm x 300mm clear opening with 75mm frame depth



CHARACTERISTIC	VALUE
Range	Tristar
Clear opening (mm)	300 x 300
Base opening (mm)	300 x 300
Overall frame (mm)	355 x 345
Frame depth (mm)	75
Waterway area (cm ²)	375
Options	► Screw locking

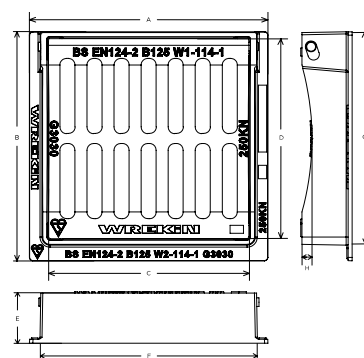

SPECIFICATION

GENERAL INFORMATION

Stock code	DGHOB3/3030
Primary material	Ductile iron
Range	Tristar
Category	Gully grate
Flanges	3

STANDARDS, CLASSES AND GROUPINGS

Standards	BS EN 124-2
BS EN 124 Class	B125
BS EN 124 Group	2
Third party certified	Kitemark
CD 526 hydraulic capacity	Out of Range

DIMENSIONS

Frame shape	Rectangular
Manhole shape	Rectangular
Overall frame (A x B)	355 mm x 345 mm
Clear opening (C x D)	300 mm x 300 mm
Frame depth (E)	75mm
Base opening (F x G)	300 mm x 300 mm
Dished depth (H)	15mm
Waterway area	375cm ²

EPD DATA

Total life cycle (cradle to grave) 30.95 kg CO₂ equivalent



FEATURES

Tel: 01543 440 440
Fax: 01543 440 444
info@wrekinproducts.com
wrekinproducts.com



- ✓ Captive hinges reduce theft risk whilst allowing easy lifting.

AVAILABLE OPTIONS

- ✓ **Screw locking**
Screw locking deters unauthorised access to the chamber. An extended shank socket set is required to engage the locking screw.

ACCESSORIES

STOCK CODE	DESCRIPTION
PC/UNIFORM/151076	Uniform chamber adjustment unit 760mm x 100mm x 15mm
PC/UNIFORM/251076	Uniform chamber adjustment unit 760mm x 100mm x 25mm
PC/UNIWEDGE/755012	Uniform support wedge 120mm x 50mm x 75mm
YPCR/U12.5	12.5Kg Unipak® rapid curing polyester resin mortar
YPCR/U25	25Kg Unipak® rapid curing polyester resin mortar

NOTES

- ▶ This product has a dished gully top arrangement
- ▶ Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
- ▶ It is the responsibility of all users to satisfy themselves the above data is current.
- ▶ All values stated are nominal within 2.5% tolerance.
- ▶ Installation details are available in the [knowledge base](#).
- ▶ All Wrekin products are supplied subject to our [Terms and Conditions of Sale](#).