


DGHOC3/3333/K

Tristar C250 3 flange gully grate 335mm x 330mm clear opening with 75mm frame depth



CHARACTERISTIC	VALUE
Range	Tristar
Clear opening (mm)	335 x 330
Base opening (mm)	355 x 350
Overall frame (mm)	480 x 420
Frame depth (mm)	75
Waterway area (cm ²)	825
Options	► Screw locking

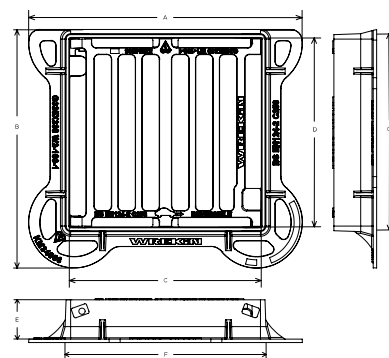

SPECIFICATION

GENERAL INFORMATION

Stock code	DGHOC3/3333/K
Primary material	Ductile iron
Range	Tristar
Category	Gully grate
Flanges	3

STANDARDS, CLASSES AND GROUPINGS

Standards	BS EN 124-2 CD 526 (formerly HA 102/17)
BS EN 124 Class	C250
BS EN 124 Group	3
Third party certified	Kitemark
CD 526 hydraulic capacity	S

DIMENSIONS

Frame shape	Rectangular
Manhole shape	Rectangular
Overall frame (A x B)	480 mm x 420 mm
Clear opening (C x D)	335 mm x 330 mm
Frame depth (E)	75mm
Base opening (F x G)	355 mm x 350 mm
Waterway area	825cm ²

EPD DATA

Total life cycle (cradle to grave) 27.64 kg CO₂ equivalent



FEATURES

Tel: 01543 440 440
Fax: 01543 440 444
info@wrekinproducts.com
wrekinproducts.com



✓ Captive hinges reduce theft risk whilst allowing easy lifting.

✓ Reversible hinge allows the grating to hinge with the direction of the traffic flow, improving safety.

AVAILABLE OPTIONS

✓ Screw locking

Screw locking deters unauthorised access to the chamber. An extended shank socket set is required to engage the locking screw.

ACCESSORIES

STOCK CODE	DESCRIPTION
PC/UNIFORM/151076	Uniform chamber adjustment unit 760mm x 100mm x 15mm
PC/UNIFORM/251076	Uniform chamber adjustment unit 760mm x 100mm x 25mm
PC/UNIWEDGE/755012	Uniform support wedge 120mm x 50mm x 75mm
YPCR/U12.5	12.5Kg Unipak [®] rapid curing polyester resin mortar
YPCR/U25	25Kg Unipak [®] rapid curing polyester resin mortar

- ▶ Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
- ▶ It is the responsibility of all users to satisfy themselves the above data is current.
- ▶ All values stated are nominal within 2.5% tolerance.
- ▶ Installation details are available in the [knowledge base](#).
- ▶ All Wrekin products are supplied subject to our [Terms and Conditions of Sale](#).

Tel: 01543 440 440
Fax: 01543 440 444
info@wrekinproducts.com
wrekinproducts.com

