


## DGHOC3/3832/K1

Tristar C250 3 flange gully grate 385mm x 320mm clear opening with 75mm frame depth, locked as standard



CHARACTERISTIC	VALUE
Range	Tristar
Clear opening (mm)	385 x 320
Base opening (mm)	410 x 350
Overall frame (mm)	545 x 425
Frame depth (mm)	75
Waterway area (cm <sup>2</sup> )	735

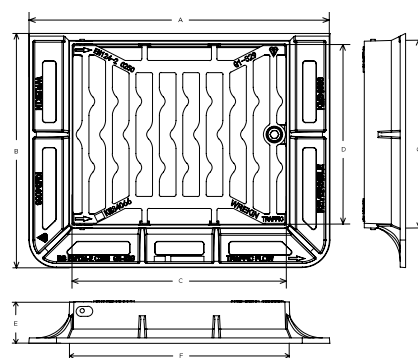

## SPECIFICATION

### GENERAL INFORMATION

Stock code	DGHOC3/3832/K1
Primary material	Ductile iron
Range	Tristar
Category	Gully grate
Flanges	3

### STANDARDS, CLASSES AND GROUPINGS

Standards	BS EN 124-2 CD 526 (formerly HA 102/17)
BS EN 124 Class	C250
BS EN 124 Group	3
Third party certified	Kitemark
CD 526 hydraulic capacity	S

### DIMENSIONS

Frame shape	Rectangular
Manhole shape	Rectangular
Overall frame (A x B)	545 mm x 425 mm
Clear opening (C x D)	385 mm x 320 mm
Frame depth (E)	75mm
Base opening (F x G)	410 mm x 350 mm
Waterway area	735cm <sup>2</sup>

### EPD DATA

Total life cycle (cradle to grave) 48.65 kg CO<sub>2</sub> equivalent



## FEATURES

Tel: 01543 440 440  
Fax: 01543 440 444  
[info@wrekinproducts.com](mailto:info@wrekinproducts.com)  
[wrekinproducts.com](http://wrekinproducts.com)



✓ Captive hinges reduce theft risk whilst allowing easy lifting.

✓ Reduced apertures provides increased safety for pedestrians and bicycles, over standard gratings.

## ACCESSORIES

STOCK CODE	DESCRIPTION
PC/UNIFORM/151076	Uniform chamber adjustment unit 760mm x 100mm x 15mm
PC/UNIFORM/251076	Uniform chamber adjustment unit 760mm x 100mm x 25mm
PC/UNIWEDGE/755012	Uniform support wedge 120mm x 50mm x 75mm
YPCR/U12.5	12.5Kg Unipak <sup>®</sup> rapid curing polyester resin mortar
YPCR/U25	25Kg Unipak <sup>®</sup> rapid curing polyester resin mortar

## NOTES

This product is locked as standard. The locking bolt can be removed with a 14mm hex key.

- ▶ Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
- ▶ It is the responsibility of all users to satisfy themselves the above data is current.
- ▶ All values stated are nominal within 2.5% tolerance.
- ▶ Installation details are available in the [knowledge base](#).
- ▶ All Wrekin products are supplied subject to our [Terms and Conditions of Sale](#).