


## DBHOB3/1311

Tristar Grade B surface box with integrated sleeve 110mm x 130mm clear opening with 75mm frame depth



CHARACTERISTIC	VALUE
Range	Tristar
Clear opening length (mm)	110 x 130
Overall frame length (mm)	Ø 210
Frame depth (mm)	75

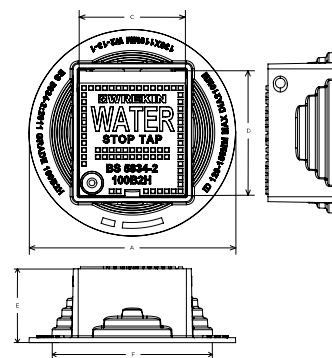

## SPECIFICATION

### GENERAL INFORMATION

Stock code	DBHOB3/1311
Primary material	Ductile iron
Range	Tristar
Category	Surface box
Flanges	4
Compatible pipe diameters	120mm, 130mm, 140mm, 150mm

### STANDARDS, CLASSES AND GROUPINGS

Standards	BS5834
BS 5834 Grade	B

### DIMENSIONS

Frame shape	Circular
Manhole shape	Square
Overall frame (A x B)	Ø 210 mm
Clear opening (C x D)	110 mm x 130 mm
Frame depth (E)	75mm
Base opening (F x G)	Ø 155 mm

### EPD DATA

Total life cycle (cradle to grave) 6.2 kg CO<sub>2</sub> equivalent



## FEATURES

- ✓ Captive hinges reduce theft risk whilst allowing easy lifting.

# ACCESSORIES

STOCK CODE	DESCRIPTION
PC/UNIFORM/151076	Uniform chamber adjustment unit 760mm x 100mm x 15mm
PC/UNIFORM/251076	Uniform chamber adjustment unit 760mm x 100mm x 25mm
PC/UNIWEDGE/755012	Uniform support wedge 120mm x 50mm x 75mm
YPCR/U6.5	6.5Kg Unipak® rapid curing polyester resin mortar

- ▶ Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
- ▶ It is the responsibility of all users to satisfy themselves the above data is current.
- ▶ All values stated are nominal within 2.5% tolerance.
- ▶ Installation details are available in the [knowledge base](#).
- ▶ All Wrekin products are supplied subject to our [Terms and Conditions of Sale](#).

Tel: 01543 440 440  
Fax: 01543 440 444  
[info@wrekinproducts.com](mailto:info@wrekinproducts.com)  
[wrekinproducts.com](http://wrekinproducts.com)

