

DBHOB3/1512


Tristar Grade B surface box with integrated sleeve 125mm x 150mm clear opening with 75mm frame depth



| RANGE | CLEAR OPENING LENGTH (MM) | OVERALL FRAME LENGTH (MM) | FRAME DEPTH (MM) |
|---------|---------------------------|---------------------------|------------------|
| Tristar | 125 x 150 | Ø 235 | 75 |

FEATURES

- ✓ Captive hinges reduce theft risk whilst allowing easy lifting.

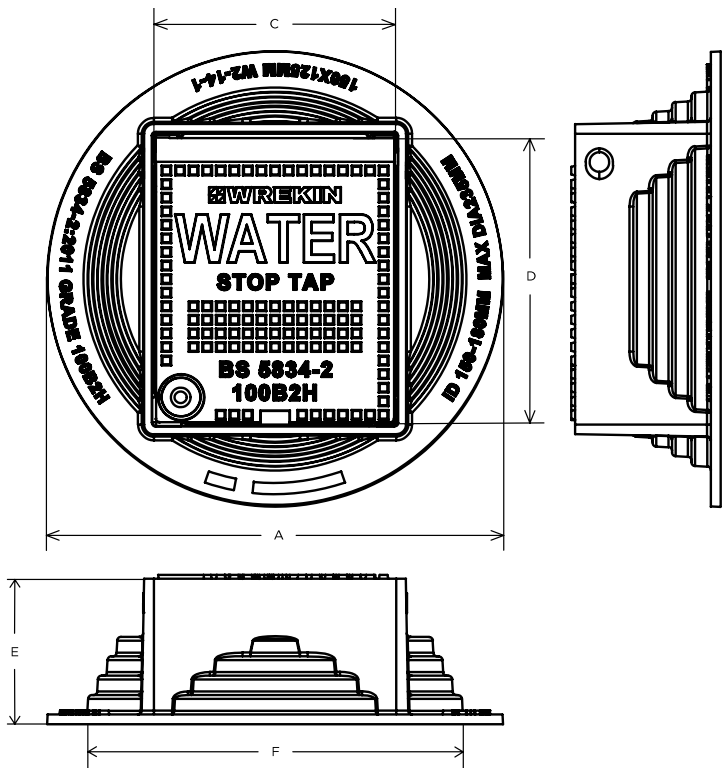

SPECIFICATION

General information

| | |
|---------------------------|----------------------------|
| Stock code | DBH0B3/1512 |
| Primary material | Ductile iron |
| Range | Tristar |
| Category | Surface box |
| Flanges | 4 |
| Compatible pipe diameters | 150mm, 160mm, 170mm, 180mm |

Standards, classes and groupings

| | |
|---------------|--------|
| Standards | BS5834 |
| BS 5834 Grade | B |

Dimensions

| | |
|-----------------------|-----------------|
| Frame shape | Circular |
| Manhole shape | Square |
| Overall frame (A x B) | Ø 235 mm |
| Clear opening (C x D) | 125 mm x 150 mm |
| Frame depth (E) | 75mm |
| Base opening (F x G) | Ø 185 mm |

ACCESSORIES

| STOCK CODE | DESCRIPTION |
|-------------------|--|
| PC/UNIFORM/151076 | Uniform chamber adjustment unit 760mm x 100mm x 15mm |
| PC/UNIFORM/251076 | Uniform chamber adjustment unit 760mm x 100mm x 25mm |

| STOCK CODE | DESCRIPTION |
|--------------------|---|
| PC/UNIWEDGE/755012 | Uniform support wedge 120mm x 50mm x 75mm |
| YPCR/U6.5 | 6.5Kg Unipak® rapid curing polyester resin mortar |

NOTES

All values stated are nominal within 2.5% tolerance.

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available on request.
4. All Wrekin products are supplied subject to our [Terms and Conditions of Sale](#)

