

DBHOB3/1512


Tristar Grade B surface box with integrated sleeve 125mm x 150mm clear opening with 75mm frame depth



RANGE	CLEAR OPENING LENGTH (MM)	OVERALL FRAME LENGTH (MM)	FRAME DEPTH (MM)
Tristar	125 x 150	Ø 235	75

FEATURES

- ✓ Captive hinges reduce theft risk whilst allowing easy lifting.

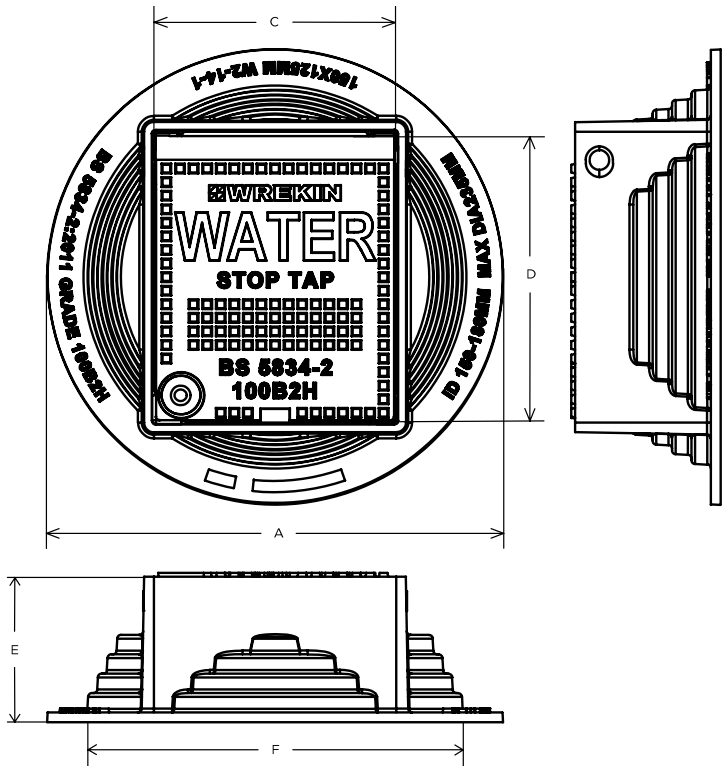

SPECIFICATION

General information

Stock code	DBHOB3/1512
Primary material	Ductile iron
Range	Tristar
Category	Surface box
Flanges	4
Compatible pipe diameters	150mm, 160mm, 170mm, 180mm

Standards, classes and groupings

Standards	BS5834
BS 5834 Grade	B

Dimensions

Frame shape	Circular
Manhole shape	Square
Overall frame (A x B)	Ø 235 mm
Clear opening (C x D)	125 mm x 150 mm
Frame depth (E)	75mm
Base opening (F x G)	Ø 185 mm

ACCESSORIES

STOCK CODE	DESCRIPTION
PC/UNIFORM/151076	Uniform chamber adjustment unit 760mm x 100mm x 15mm
PC/UNIFORM/251076	Uniform chamber adjustment unit 760mm x 100mm x 25mm
PC/UNIWEDGE/755012	Uniform support wedge 120mm x 50mm x 75mm

STOCK CODE	DESCRIPTION
YPCR/U6.5	6.5Kg Unipak [®] rapid curing polyester resin mortar

NOTES

All values stated are nominal within 2.5% tolerance.

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available in the [knowledge base](#).
4. All Wrekin products are supplied subject to our [Terms and Conditions of Sale](#)

