



DBHOB3/1515

Tristar Grade B surface box with integrated sleeve 150mm x 150mm clear opening with 75mm frame depth

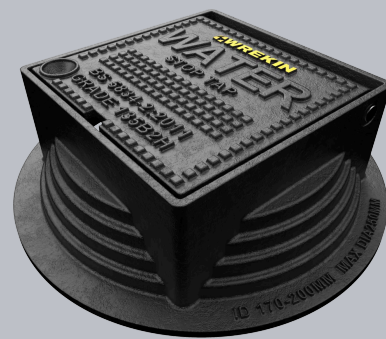

CHARACTERISTIC	VALUE
Range	Tristar
Clear opening length (mm)	150 x 150
Overall frame length (mm)	Ø 250
Frame depth (mm)	75

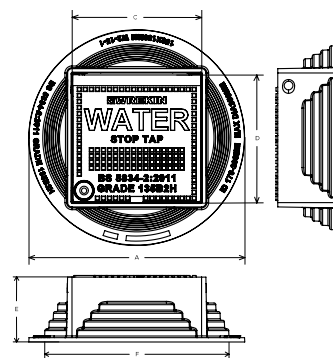

SPECIFICATION

GENERAL INFORMATION

Stock code	DBHOB3/1515
Primary material	Ductile iron
Range	Tristar
Category	Surface box
Flanges	4
Compatible pipe diameters	170mm, 180mm, 190mm, 200mm

STANDARDS, CLASSES AND GROUPINGS

Standards	BS5834
BS 5834 Grade	B

DIMENSIONS

Frame shape	Circular
Manhole shape	Square
Overall frame (A x B)	Ø 250 mm
Clear opening (C x D)	150 mm x 150 mm
Frame depth (E)	75mm
Base opening (F x G)	Ø 205 mm

EPD DATA

Total life cycle (cradle to grave) 7.96 kg CO₂ equivalent



FEATURES

- ✓ Captive hinges reduce theft risk whilst allowing easy lifting.

ACCESSORIES

STOCK CODE	DESCRIPTION
PC/UNIFORM/151076	Uniform chamber adjustment unit 760mm x 100mm x 15mm
PC/UNIFORM/251076	Uniform chamber adjustment unit 760mm x 100mm x 25mm
PC/UNIWEDGE/755012	Uniform support wedge 120mm x 50mm x 75mm
YPCR/U6.5	6.5Kg Unipak® rapid curing polyester resin mortar

- ▶ Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
- ▶ It is the responsibility of all users to satisfy themselves the above data is current.
- ▶ All values stated are nominal within 2.5% tolerance.
- ▶ Installation details are available in the [knowledge base](#).
- ▶ All Wrekin products are supplied subject to our [Terms and Conditions of Sale](#).

Tel: 01543 440 440
Fax: 01543 440 444
info@wrekinproducts.com
wrekinproducts.com

