

**DBHOB3/1515**


Tristar Grade B surface box with integrated sleeve 150mm x 150mm clear opening with 75mm frame depth



RANGE	CLEAR OPENING LENGTH (MM)	OVERALL FRAME LENGTH (MM)	FRAME DEPTH (MM)
Tristar	150 x 150	Ø 250	75

**FEATURES**

- ✓ Captive hinges reduce theft risk whilst allowing easy lifting.

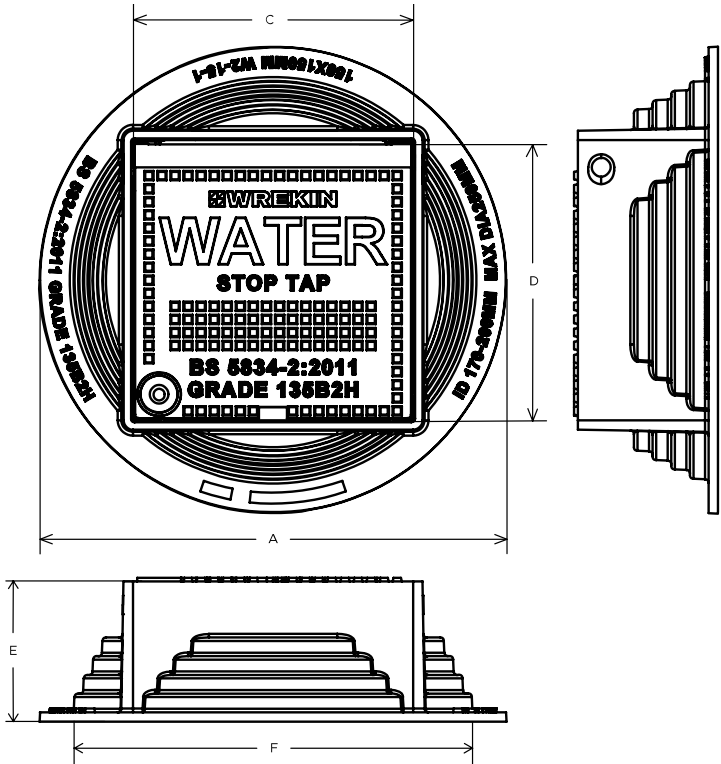

## SPECIFICATION

### General information

Stock code	DBHOB3/1515
Primary material	Ductile iron
Range	Tristar
Category	Surface box
Flanges	4
Compatible pipe diameters	170mm, 180mm, 190mm, 200mm

### Standards, classes and groupings

Standards	BS5834
BS 5834 Grade	B

### Dimensions

Frame shape	Circular
Manhole shape	Square
Overall frame (A x B)	Ø 250 mm
Clear opening (C x D)	150 mm x 150 mm
Frame depth (E)	75mm
Base opening (F x G)	Ø 205 mm

## ACCESSORIES

STOCK CODE	DESCRIPTION
PC/UNIFORM/151076	Uniform chamber adjustment unit 760mm x 100mm x 15mm
PC/UNIFORM/251076	Uniform chamber adjustment unit 760mm x 100mm x 25mm
PC/UNIWEDGE/755012	Uniform support wedge 120mm x 50mm x 75mm

STOCK CODE	DESCRIPTION
YPCR/U6.5	6.5Kg Unipak <sup>®</sup> rapid curing polyester resin mortar

## NOTES

All values stated are nominal within 2.5% tolerance.

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available in the [knowledge base](#).
4. All Wrekin products are supplied subject to our [Terms and Conditions of Sale](#)

