



## DBHOB3/1515

Tristar Grade B surface box with integrated sleeve 150mm x 150mm clear opening with 75mm frame depth

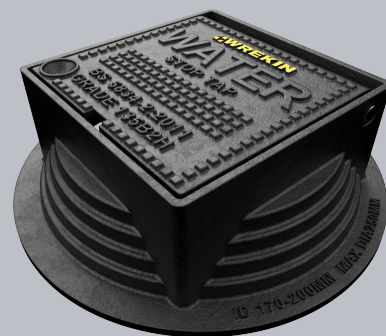

| CHARACTERISTIC            | VALUE     |
|---------------------------|-----------|
| Range                     | Tristar   |
| Clear opening length (mm) | 150 x 150 |
| Overall frame length (mm) | Ø 250     |
| Frame depth (mm)          | 75        |

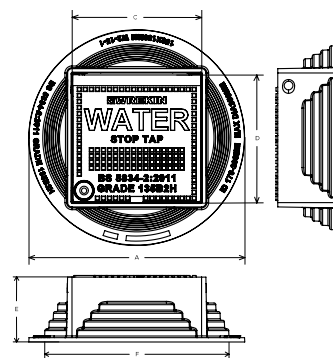

## SPECIFICATION

### GENERAL INFORMATION

|                           |                            |
|---------------------------|----------------------------|
| Stock code                | DBHOB3/1515                |
| Primary material          | Ductile iron               |
| Range                     | Tristar                    |
| Category                  | Surface box                |
| Flanges                   | 4                          |
| Compatible pipe diameters | 170mm, 180mm, 190mm, 200mm |

### STANDARDS, CLASSES AND GROUPINGS

|               |        |
|---------------|--------|
| Standards     | BS5834 |
| BS 5834 Grade | B      |

### DIMENSIONS

|                       |                 |
|-----------------------|-----------------|
| Frame shape           | Circular        |
| Manhole shape         | Square          |
| Overall frame (A x B) | Ø 250 mm        |
| Clear opening (C x D) | 150 mm x 150 mm |
| Frame depth (E)       | 75mm            |
| Base opening (F x G)  | Ø 205 mm        |

### EPD DATA

|                                    |                                    |
|------------------------------------|------------------------------------|
| Total life cycle (cradle to grave) | 7.96 kg CO <sub>2</sub> equivalent |
|------------------------------------|------------------------------------|



## FEATURES

- ✓ Captive hinges reduce theft risk whilst allowing easy lifting.

# ACCESSORIES

| STOCK CODE         | DESCRIPTION   |
|--------------------|---|
| PC/UNIFORM/151076  | Uniform chamber adjustment unit 760mm x 100mm x 15mm          |
| PC/UNIFORM/251076  | Uniform chamber adjustment unit 760mm x 100mm x 25mm          |
| PC/UNIWEDGE/755012 | Uniform support wedge 120mm x 50mm x 75mm                     |
| YPCR/U6.5          | 6.5Kg Unipak <sup>®</sup> rapid curing polyester resin mortar |

- ▶ Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
- ▶ It is the responsibility of all users to satisfy themselves the above data is current.
- ▶ All values stated are nominal within 2.5% tolerance.
- ▶ Installation details are available in the [knowledge base](#).
- ▶ All Wrekin products are supplied subject to our [Terms and Conditions of Sale](#).