



CALPRO60N/067067


Triple sealed Aluminium Recessed Access Cover, 675mm x 675mm clear opening, 40mm tray depth, 60mm frame depth, Loading code N



| CLEAR OPENING (MM) | OVERALL TOP OF FRAME (MM) | FRAME DEPTH (MM) | LOAD DUTY |
|-----------------------|------------------------------|---------------------|-------------|
| 675 x 675 | 765 x 765 | 60 | Medium duty |

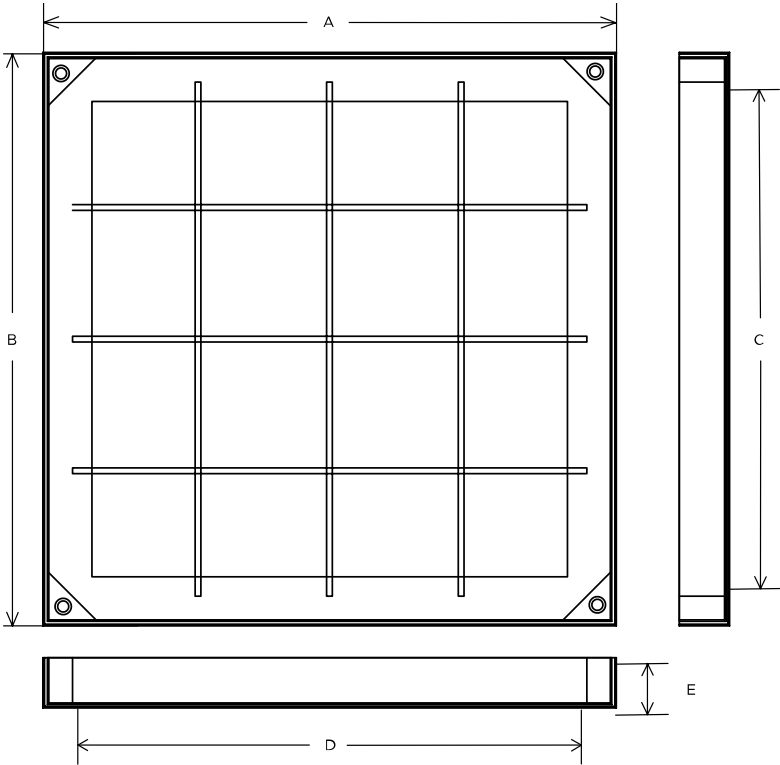

EPDM T Gasket

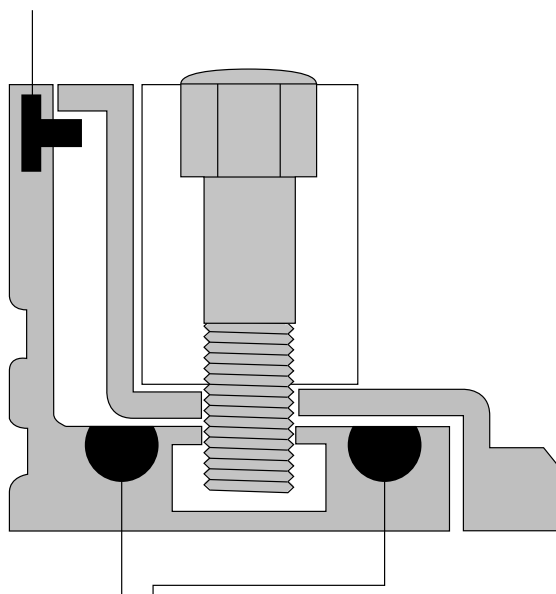

2x EPDM 8mm Gaskets

SPECIFICATION

General information

| | |
|--|------------------|
| Stock code | CALPRO60N/067067 |
| Primary material | Aluminium |
| Category | Access cover |
| Flanges | 4 |
| Gross laden vehicle weight | 25 tn |
| Load duty | Medium duty |
| Slow moving wheel load (pneumatic tyres) | 5 tn |
| Seal type | Triple seal |

Standards, classes and groupings

Wrekin loading code N

Dimensions

Overall top of frame (A x B) 765 mm x 765 mm

Clear opening (C x D) 675 mm x 675 mm

Frame depth (E) 60mm

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available in the [knowledge base](#).
4. All Wrekin products are supplied subject to our [Terms and Conditions of Sale](#)

