

DBTOD4/4428/KT


Tristar D400 surface box 445mm x 280mm clear opening with 100mm frame depth



RANGE	CLEAR OPENING (MM)	OVERALL FRAME (MM)	FRAME DEPTH (MM)
Tristar	445 x 280	565 x 400	100

FEATURES

- ✓ 70+ PSRV tested at top surface of chequer by UKAS accredited 3rd party.
- ✓ Non rocking 3-point suspension design, for silent operation.
- ✓ The high seating position ensures that forces are transmitted more directly downwards, meaning conversion of traffic loads into mortar-compatible compression forces.
- ✓ Holes in the frame flange where mortar can pass between the underside and top side, creating an interlock, providing greater strength.
- ✓ Safety keyway prevents accidental disengagement of the lifting key during the handling process.
- ✓ Frame gussets are supports which reinforce the corners where the frame sections meet, distributing stress evenly, preventing damage to the frame or the access cover.
- ✓ Indexed corners ensure correct orientation first time, every time.
- ✓ Can be installed by a single person, providing labour cost savings.

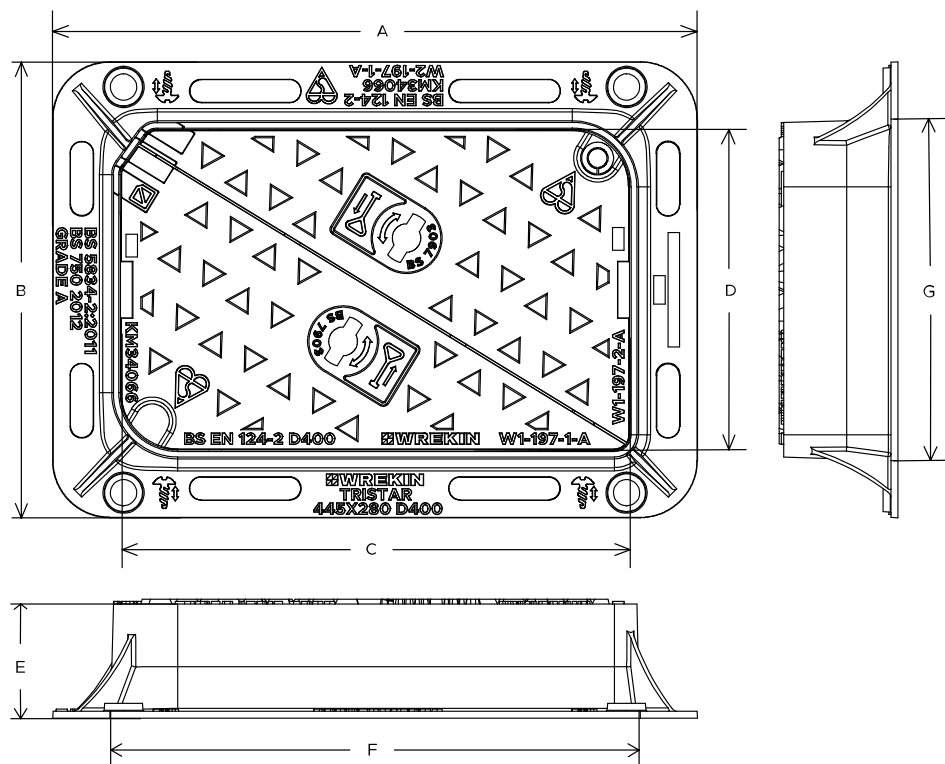

SPECIFICATION

General information

Stock code	DBTOD4/4428/KT
Primary material	Ductile iron
Range	Tristar
Category	Surface box
Flanges	4

Standards, classes and groupings

Standards	BS EN 124-2 BS5834 BS750
BS EN 124 Class	D400
BS EN 124 Group	4

Third party certified	Kitemark
BS 5834 Grade	A
BS 750 Grade	A
Dimensions	
Frame shape	Rectangular
Manhole shape	Rectangular
Overall frame (A x B)	565 mm x 400 mm
Clear opening (C x D)	445 mm x 280 mm
Frame depth (E)	100mm
Base opening (F x G)	465 mm x 300 mm

ACCESSORIES

STOCK CODE	DESCRIPTION
PC/UNIFORM/151076	Uniform chamber adjustment unit 760mm x 100mm x 15mm
PC/UNIFORM/251076	Uniform chamber adjustment unit 760mm x 100mm x 25mm
PC/UNIWEDGE/755012	Uniform support wedge 120mm x 50mm x 75mm
YPCR/U6.5	6.5Kg Unipak® rapid curing polyester resin mortar
GRITBLOCKER	Anti-blockage keyway insert
KEY/LONG	Large cover lifting keys with a long handle (sold as a pair)
KEYS/L	Small cover combined lifting key

NOTES

All values stated are nominal within 2.5% tolerance.

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available in the [knowledge base](#).
4. All Wrekin products are supplied subject to our [Terms and Conditions of Sale](#)

