


## FasTrack 29/29

FasTrack 2929 Woven Geotextile, 4100N, 173g/m<sup>2</sup> - 5.25m x 100m roll

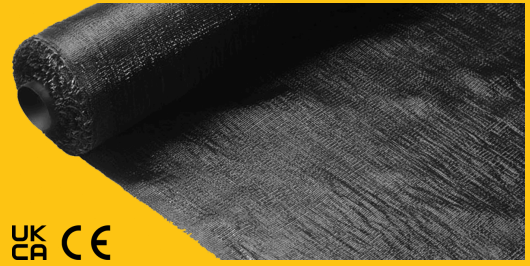

UK  
CA CE

### DESCRIPTION

FasTrack 2929 Woven Geotextile, 4100N, 173g/m<sup>2</sup> - 5.25m x 100m roll

## SPECIFICATION

### General information

Stock code	GTSG/FASTRACK/2929
Range	FasTrack
Third party certified	UKCA CE
Roll sizes	5.25m x 100m
Geotextile product range	FasTrack

### Geotextile properties

Material		Polypropylene
Tensile strength (MD)	EN ISO 10319	29kN/m
Tensile strength (CMD)	EN ISO 10319	29kN/m
Elongation at max load (MD)	EN ISO 10319	26%
Elongation at max load (CMD)	EN ISO 10319	26%
Static puncture resistance	EN ISO 12236	4.1kN
Dynamic perforation resistance	EN ISO 13433	11mm

<b>CBR puncture resistance</b>	EN ISO 12236	4100N
<b>Dynamic cone drop</b>	EN ISO 13433	11mm
<b>Water permeability</b>	EN ISO 11058	23L/m <sup>2</sup> .s
<b>Characteristic opening size</b>	EN ISO 12956	330µm
<b>Thickness under 2kPa</b>	EN ISO 9863-1	1mm
<b>Weight</b>	EN ISO 9864	173g/m <sup>2</sup>

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available on request.
4. All Wrekin products are supplied subject to our [Terms and Conditions of Sale](#)

