


**C271M/060045**


Steel Recessed Access Cover, double seal and locked, 600mm x 450mm clear opening, 58mm tray depth, Loading code M



CLEAR OPENING (MM)	OVERALL TOP OF FRAME (MM)	FRAME DEPTH (MM)	LOAD DUTY
600 x 450	685 x 535	58	Light / medium duty

**KEY FEATURES**

✓ Hot dipped galvanised for corrosion resistance.

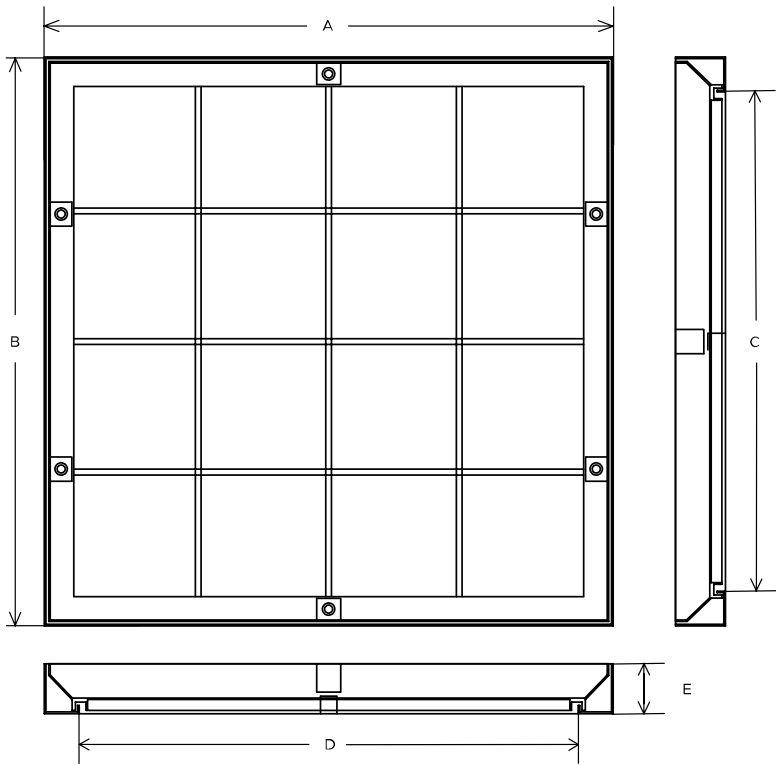

# SPECIFICATION

## General information

Stock code	C271M/060045
Primary material	Steel
Category	Access cover
Flanges	4

## Standards, classes and groupings

Wrekin loading code	M
---------------------	---

## Steel-specific product data

Gross laden vehicle weight	10 tn
Load duty	Light / medium duty
Slow moving wheel load (pneumatic tyres)	2.5
Seal type	Double seal

## Dimensions

Frame shape	Rectangular
Overall top of frame (A x B)	535 mm x 685 mm
Clear opening (C x D)	600 mm x 450 mm
Frame depth (E)	58mm
Base opening (F x G)	

## ACCESSORIES

STOCK CODE	DESCRIPTION
KEYSRECESSED	Recessed cover lifting keys (sold as a pair)

## NOTES

Full loading capability is achieved when fully filled with grade C25 concrete

Mild steel - Galvanised to BS EN ISO 1461

Locking screws - Countersunk, slotted, M8 x 45 mm long

Unlocking - Flathead screwdriver

Lifting keys - Wire J-shaped key (Wrekin product code KEYSRECESSED)

The vertical top edge of the cover will accept up to a 12 mm tile

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available on request.
4. All Wrekin products are supplied subject to our [Terms and Conditions of Sale](#)



FM 32898

EN 759038



