


## C291X/060045/TR

Steel Recessed Access Cover, double seal, 600mm x 450mm clear opening, 131mm tray depth, Loading code X

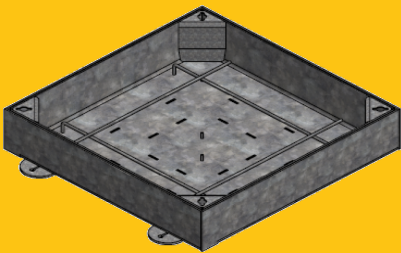

CLEAR OPENING (MM)	OVERALL TOP OF FRAME (MM)	FRAME DEPTH (MM)	LOAD DUTY
600 x 450	656 x 600	131	Heavy duty

## KEY FEATURES

✓ Hot dipped galvanised for corrosion resistance.

## SPECIFICATION

### General information

Stock code	C291X/060045/TR
Primary material	Steel
Category	Access cover
Flanges	4
Gross laden vehicle weight	44 tn
Load duty	Heavy duty
Slow moving wheel load (pneumatic tyres)	11.5
Seal type	Double seal

## Standards, classes and groupings

Wrekin loading code X

## Dimensions

Frame shape	Rectangular
Overall top of frame (A x B)	600 mm x 656 mm
Clear opening (C x D)	600 mm x 450 mm
Frame depth (E)	131mm
Base opening (F x G)	

## ACCESSORIES

STOCK CODE	DESCRIPTION
KEYSHEAVY	Large cover lifting keys with a standard handle (sold as a pair)

## NOTES

Full loading capability is achieved when fully filled with grade C25 concrete

Mild steel - Galvanised to BS EN ISO 1461

Locking screws - Countersunk, slotted, M8 x 120 mm long (2 per product)

Unlocking - Flathead screwdriver

Lifting key - Standard heavy duty (Wrekin product code KEYSHEAVY)

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available on request.
4. All Wrekin products are supplied subject to our [Terms and Conditions of Sale](#)

