


FasTrack 35/35

Polypropylene Woven Geotextile, 3600N, 140g/m² - 5.25m x 100m roll

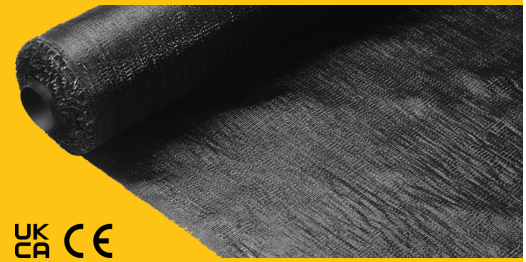

PRODUCT NAME	DESCRIPTION
FasTrack 35/35	Polypropylene Woven Geotextile, 3600N, 140g/m ² - 5.25m x 100m roll

Details

Third party certified		CE UKCA
Tensile strength (MD)	EN ISO 10319	35kN/m
Tensile strength (CMD)	EN ISO 10319	35kN/m
Elongation at max load (MD)	EN ISO 10319	15%
Elongation at max load (CMD)	EN ISO 10319	14%
Static puncture resistance	EN ISO 12236	3.6kN
Dynamic perforation resistance	EN ISO 13433	16mm
Dynamic cone drop	EN ISO 13433	16mm
Water permeability	EN ISO 11058	30L/m ² .s
Characteristic opening size	EN ISO 12956	390µm
Thickness under 2kPa	EN ISO 9863-1	1mm
Weight	EN ISO 9864	140g/m ²
Roll width		5.25m
Roll length		100m

Roll diameter

27cm

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available on request.

