

DMS1B2/45D/K


Safeseal B125 circular manhole cover 450mm diameter clear opening with 30mm frame depth



RANGE	OVERALL FRAME (A)	CLEAR OPENING (C)	FRAME DEPTH (E)	BASE OPENING (F)
Safeseal	Ø 550 mm	Ø 450 mm	30 mm	Ø 490 mm

KEY FEATURES

- ✓ Indexed covers ensure correct fit first time, every time.
- ✓ Safety keyway prevents accidental disengagement of the lifting key during the handling process.
- ✓ Labyrinth seal helps to prevent odour escapes and water ingress.
- ✓ 70+PSRV tested at top surface of chequer by UKAS accredited 3rd party.

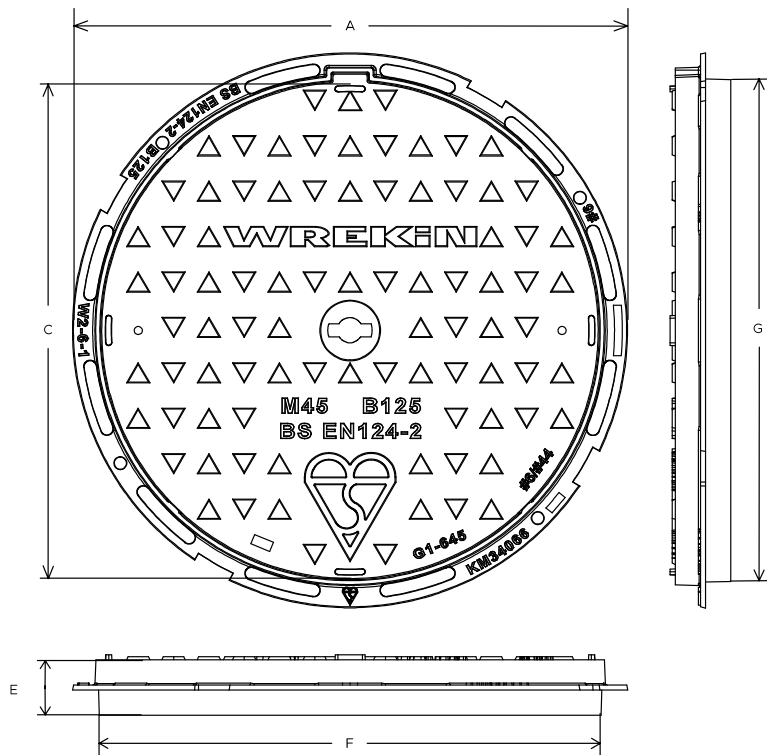

SPECIFICATION

General information

Stock code	DMS1B2/45D/K
Primary material	Ductile iron
Range	Safeseal
Category	Manhole cover
Flanges	4

Standards, classes and groupings

Standards	BS EN 124
BS EN 124 Class	B125
BS EN 124 Group	2
Third party certified	Kitemark

Dimensions

Frame shape	Circular
Manhole shape	Circular
Overall frame (A x B)	x 550 mm
Clear opening (C x D)	x 450 mm
Frame depth (E)	30mm
Base opening (F x G)	x 490 mm

NOTES

All values stated are nominal within 2.5% tolerance.

ACCESSORIES

STOCK CODE	PRODUCT NAME	DESCRIPTION
PC/UNIFORM/151076	Uniform	Uniform chamber adjustment unit 760mm x 100mm x 15mm
PC/UNIFORM/251076	Uniform	Uniform chamber adjustment unit 760mm x 100mm x 25mm
PC/UNIWEDGE/755012	Uniform	Uniform support wedge 120mm x 50mm x 75mm
YPCR/U12.5	UniPak Mortar	12.5Kg Unipak rapid curing polyester resin mortar
YPCR/U25	UniPak Mortar	25Kg Unipak rapid curing polyester resin mortar
KEY/LONG	Lifting Key	Large cover lifting keys with a long handle (sold as a pair)
KEYS/L	Lifting Key	Small cover combined lifting key
KEYSHEAVY	Lifting Key	Large cover lifting keys with a standard handle (sold as a pair)
DREDRING/45/35	Reducer ring	Reducer ring with a 350mm inner diameter and 460mm outer diameter

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available on request.

