

## DGHTOD6/4337/KH4F


Highway D400 4 flange gully grate 430mm x 370mm clear opening with 150mm frame depth



| RANGE   | OVERALL FRAME (A X B) | CLEAR OPENING (C X D) | FRAME DEPTH (E) | BASE OPENING (F X G) | WATERWAY AREA         |
|---------|-----------------------|-----------------------|-----------------|----------------------|-----------------------|
| Highway | 625 mm x 565 mm       | 430 mm x 370 mm       | 150 mm          | 450 mm x 390 mm      | 1,000 cm <sup>2</sup> |

### Key features

- ✓ Captive hinges reduce theft risk whilst allowing easy lifting.
- ✓ Enlarged frame corners help to dissipate, load minimising bearing pressure.
- ✓ Mechanical lifting points are provided.

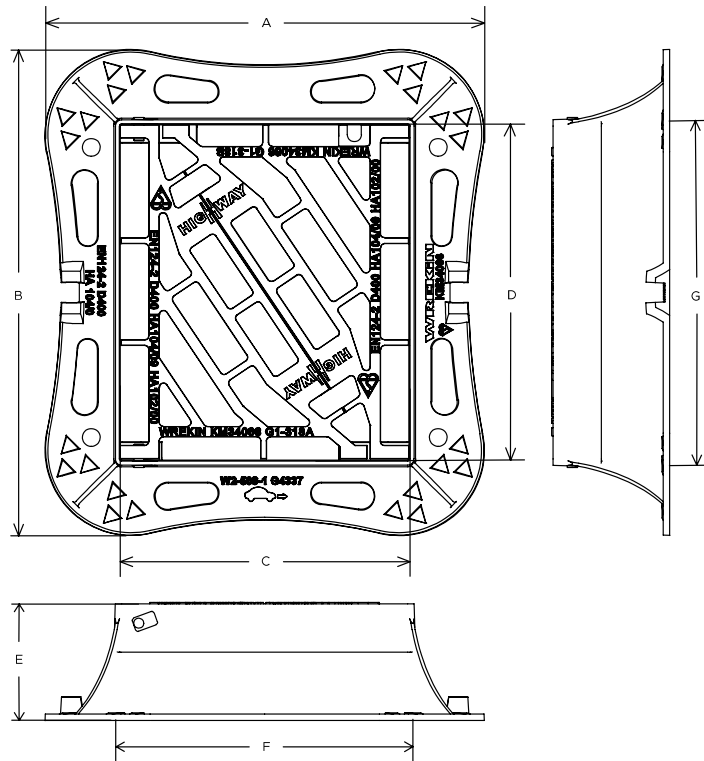

## General information

|                  |                   |
|------------------|-------------------|
| Stock code       | DGHT0D6/4337/KH4F |
| Primary material | Ductile iron      |
| Range            | <u>Highway</u>    |
| Category         | Gully grate       |
| Flanges          | 4                 |

## Standards, classes and groupings

|                          |   |
|--------------------------|---|
| Standards                | BS EN 124<br>CD 534<br>CD 526<br>DMRB<br>MCHW |
| BS EN 124 Class          | D400  |
| BS EN 124 Group          | 3<br>4  |
| Third party certified    | Kitemark                                      |
| CD526 Hydraulic Capacity | R   |

## Dimensions

|                          |             |
|--------------------------|-------------|
| Frame shape              | Rectangular |
| Manhole shape            | Rectangular |
| Overall frame length (A) | 625 mm      |
| Overall frame width (B)  | 565 mm      |
|                          | 400 mm      |

|                                 |                       |
|---------------------------------|-----------------------|
| <b>Clear opening length (C)</b> |                       |
| <b>Clear opening width (D)</b>  | 370 mm                |
| <b>Frame depth (E)</b>          | 150 mm                |
| <b>Base opening length (F)</b>  | 450 mm                |
| <b>Base opening width (G)</b>   | 390 mm                |
| <b>Waterway area</b>            | 1,000 cm <sup>2</sup> |

## Accessories

| STOCK CODE         | PRODUCT NAME  | DESCRIPTION                                       |
|--------------------|---------------|---|
| PC/UNIFORM/151076  | UniForm       | UniForm packing plate 760mm x 100mm x 15mm        |
| PC/UNIFORM/151576  | UniForm       | UniForm packing plate 760mm x 150mm x 15mm        |
| PC/UNIFORM/251076  | UniForm       | UniForm packing plate 760mm x 100mm x 25mm        |
| PC/UNIFORM/251576  | UniForm       | UniForm packing plate 760mm x 150mm x 25mm        |
| PC/UNIFORM/451076  | UniForm       | UniForm packing plate 760mm x 100mm x 45mm        |
| PC/UNIFORM/451576  | UniForm       | UniForm packing plate 760mm x 150mm x 45mm        |
| PC/UNIWEDGE/755012 | UniForm       | UniForm support wedge 120mm x 50mm x 75mm         |
| YPCR/U12.5         | UniPak Mortar | 12.5Kg UniPak rapid curing polyester resin mortar |
| YPCR/U25           | UniPak Mortar | 25Kg UniPak rapid curing polyester resin mortar   |
| SCREWLIFT          | ScrewLift     | Manhole cover levelling system                    |

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available on request.



FM32898

