

DMS1A1/45D/K (discontinued)


Safeseal A15 manhole cover 450mm diameter clear opening with 30mm frame depth



SUPERSEDED BY

Stock code	Range	Overall frame (mm)	Clear opening (mm)	Frame depth (mm)	Options
DMS1A2/45D/K	Safeseal	Ø 540	Ø 450	30	<input type="checkbox"/> Neoprene seal <input type="checkbox"/> Pressure relief holes

CHARACTERISTIC	VALUE
Range	Safeseal
Overall frame (mm)	Ø 540
Clear opening (mm)	Ø 450
Frame depth (mm)	30
Options	► Neoprene seal ► Pressure relief holes

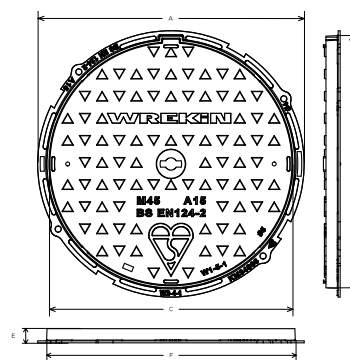

SPECIFICATION

GENERAL INFORMATION

Stock code	DMS1A1/45D/K
Primary material	Ductile iron
Range	Safeseal
Category	Manhole cover
Flanges	4

STANDARDS, CLASSES AND GROUPINGS

Standards	BS EN 124-2
BS EN 124 Class	A15
BS EN 124 Group	1
Third party certified	Kitemark

DIMENSIONS

Frame shape	Circular
Manhole shape	Circular
Overall frame (A x B)	Ø 540 mm
Clear opening (C x D)	Ø 450 mm
Frame depth (E)	30mm
Base opening (F x G)	Ø 450 mm

EPD DATA

Total life cycle (cradle to grave)	28.52 kg CO ₂ equivalent
------------------------------------	-------------------------------------



FEATURES

- ✓ Indexed corners ensure correct orientation first time, every time.
- ✓ Labyrinth seal helps to prevent odour escapes and water ingress.
- ✓ Safety keyway prevents accidental disengagement of the lifting key during the handling process.
- ✓ 70+ PSRV tested at top surface of chequer by UKAS accredited 3rd party.

AVAILABLE OPTIONS

- ✓ **Neoprene seal**
A neoprene seal can be included to reduce ingress and egress of dirt and gasses from the chamber.
- ✓ **Pressure relief holes**
Pressure relief holes provide additional airflow, with sizes permitted up to the maximum allowances specified in BS EN 124.

ACCESSORIES

STOCK CODE	DESCRIPTION
PC/UNIFORM/151076	Uniform chamber adjustment unit 760mm x 100mm x 15mm
PC/UNIFORM/251076	Uniform chamber adjustment unit 760mm x 100mm x 25mm
PC/UNIWEDGE/755012	Uniform support wedge 120mm x 50mm x 75mm
YPCR/U12.5	12.5Kg Unipak [®] rapid curing polyester resin mortar
YPCR/U25	25Kg Unipak [®] rapid curing polyester resin mortar
KEY/LONG	Large cover lifting keys with a long handle (sold as a pair)
KEYS/L	Small cover combined lifting key
DREDRING/45/35	Reducer ring with a 350mm inner diameter and 460mm outer diameter

- ▶ Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
- ▶ It is the responsibility of all users to satisfy themselves the above data is current.
- ▶ All values stated are nominal within 2.5% tolerance.
- ▶ Installation details are available in the [knowledge base](#).
- ▶ All Wrekin products are supplied subject to our [Terms and Conditions of Sale](#).

Tel: 01543 440 440
Fax: 01543 440 444
info@wrekinproducts.com
wrekinproducts.com

