

**DBHOB3/1311**


Tristar surface box with integrated sleeve 110mm x 130mm clear opening with 75mm frame depth



RANGE	CLEAR OPENING LENGTH (MM)	OVERALL FRAME LENGTH (MM)	FRAME DEPTH (MM)
Tristar	110 x 130	Ø 210	75

**KEY FEATURES**

- ✓ Captive hinges reduce theft risk whilst allowing easy lifting.

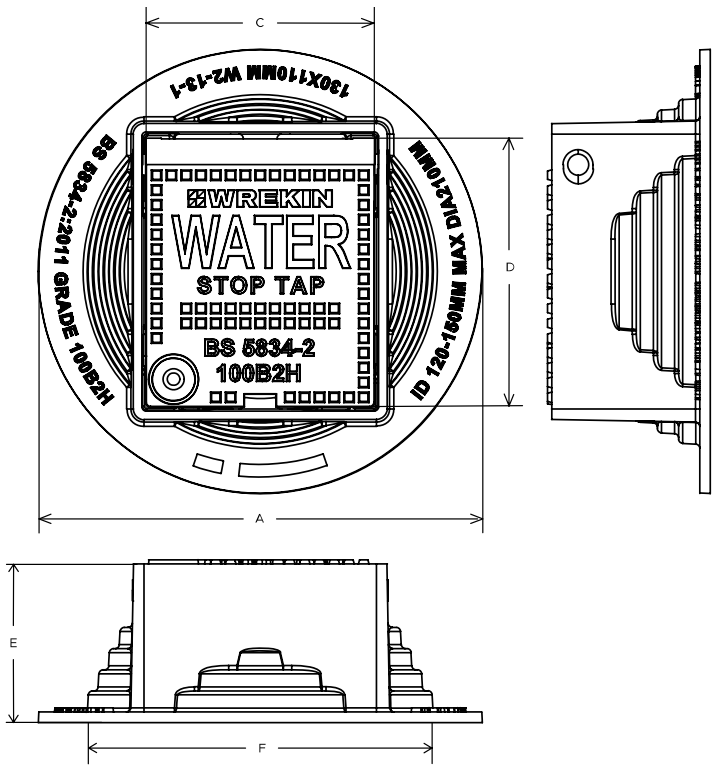

## SPECIFICATION

### General information

Stock code	DBH0B3/1311
Primary material	Ductile iron
Range	Tristar
Category	Surface box
Flanges	4
Compatible pipe diameters	120mm, 130mm, 140mm, 150mm

### Standards, classes and groupings

Standards	BS5834
BS5834 Grade	B

### Dimensions

Frame shape	Circular
Manhole shape	Square
Overall frame (A x B)	210 mm x
Clear opening (C x D)	110 mm x 130 mm
Frame depth (E)	75mm
Base opening (F x G)	Ø 155 mm

## ACCESSORIES

STOCK CODE	DESCRIPTION
PC/UNIFORM/151076	Uniform chamber adjustment unit 760mm x 100mm x 15mm

STOCK CODE	DESCRIPTION
PC/UNIFORM/251076	Uniform chamber adjustment unit 760mm x 100mm x 25mm
PC/UNIWEDGE/755012	Uniform support wedge 120mm x 50mm x 75mm
YPCR/U6.5	6.5Kg Unipak® rapid curing polyester resin mortar

## NOTES

All values stated are nominal within 2.5% tolerance.

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available on request.
4. All Wrekin products are supplied subject to our [Terms and Conditions of Sale](#)

