


## SX Composite 3030

SX Composite 3030 composed of a thermally bonded SX Geogrid and Geotextile - 5.2m x 50m roll

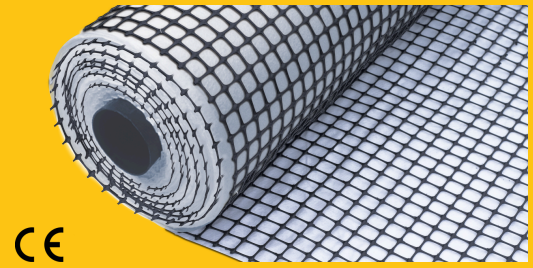

### DESCRIPTION

SX Composite 3030 composed of a thermally bonded SX Geogrid and Geotextile - 5.2m x 50m roll

## SPECIFICATION

### General information

Stock code	GGC/COMBSX30/5.2X50
Range	SX Grid
Third party certified	CE
Roll sizes	5.25m x 50m
Geogrid product range	SX Grid

### Geogrid properties

Tensile strength (MD)	EN ISO 10319	30kN/m
Tensile strength (CMD)	EN ISO 10319	30kN/m
Tensile load (2% strain) (MD)	EN ISO 10319	11kN/m
Tensile load (2% CMD)	EN ISO 10319	11kN/m
Tensile load (5% strain) (MD)	EN ISO 10319	21kN/m
Tensile load (5% CMD)	EN ISO 10319	21kN/m
Aperture opening size		38mm x 38mm

## Geotextile properties

<b>Material</b>		Polypropylene
<b>Tensile strength (MD)</b>	EN ISO 10319	10kN/m
<b>Tensile strength (CMD)</b>	EN ISO 10319	10kN/m
<b>Elongation at max load (MD)</b>	EN ISO 10319	40%
<b>Elongation at max load (CMD)</b>	EN ISO 10319	90%
<b>Static puncture resistance</b>	EN ISO 12236	1.5kN
<b>CBR puncture resistance</b>	EN ISO 12236	1500N

## NOTES

**Weight:** 114kg  $\pm$ 10%

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available on request.
4. All Wrekin products are supplied subject to our [Terms and Conditions of Sale](#)

