


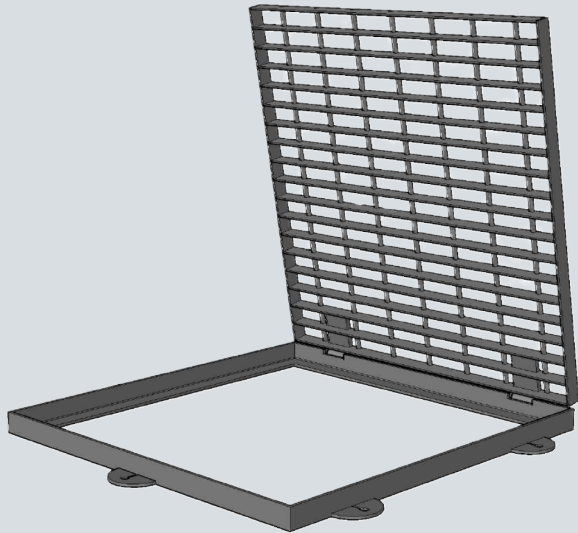

**SCAN
FOR
MORE
INFO**

Wrekin's fabricated hinged open mesh flooring is constructed from standard forge welded panels. They are cut to customer's requirements, fully edged and supported in a substantial angle frame, with external fixing lugs.

KEY ATTRIBUTES

- ✓ Hot dip galvanised to BS EN:ISO 1461
- ✓ Cut to customers requirements
- ✓ Manufactured from mild steel

STANDARD OPTIONS

- ▶ Locking screws
- ▶ Hasp / staple for padlock
- ▶ Removable access point
- ▶ Cut outs for value spindles / cables
- ▶ Hot dip galvanised to BS EN ISO 1461
- ▶ Hinged

GALVANISING OPTIONS

- ▶ 70 Micron (Standard)
- ▶ 100 Micron
- ▶ 140 Micron

BESPOKE OPTIONS

- ▶ Bespoke mesh
- ▶ Heavier loading available

LOADINGS	
LOADING (kN m ²)	CODE
SkN (Pedestrian)	K

LOADINGS	
WREKIN CODE	COMPARATIVE FACTA CLASS
K	A

