



Recessed Cover for Paving Infill

This range of recessed covers and frames are for use in areas of block paving where it is desirable to have continuity of surface finish. They are recessed 100mm for use with up to 80mm block paving and galvanised to BS EN ISO 1461. Non-standard sizes available on request.

KEY ATTRIBUTES

- Hot dip galvanised to BS EN ISO 1461
- Keyway fitting provision
- 100mm recess depth

- Recessed cover for block paving
- Manufactured from Mild Steel

FRAME DIMENSIONS K, L & M LOADINGS

K, L & M LOADINGS		
Dim A	Clear opening	
Dim B	Dim A + 106mm	
Dim C	Dim B + 100mm	
Dim D	Depth of recess	
Dim E	Dim D + 6mm	
Dim E (double seal)	Dim D + 8mm	

FRAME DIMENSIONS N, P, & X LOADINGS

Dim A	Clear opening
Dim B	Dim A + 110mm
Dim C	Dim B + 100mm
Dim D	Depth of recess
Dim E	Dim D + 10mm
Dim E (double seal)	Dim D + 12mm

AVAILABLE OPTIONS

- Locking
- ▶ Threaded lifting points
- Service indicator badge
- ▶ Full external flange
- Safety grid
- Double Seal (including neoprene seal & locking screws)
- Ventilated
- Sealing Plates
- ▶ Stainless Steel Edge
- ▶ Alternative Tray Depth
- ▶ Square to round (See image on page 2)

MATERIAL OPTIONS

- ▶ Galvanised mild steel
- ▶ Stainless steel grade 304
- ▶ Stainless steel grade 316

GALVANISING OPTIONS

- ▶ 70 Micron (Standard)
- ▶ 100 Micron
- ▶ 140 Micron



Tel: 01543 440 440 Fax: 01543 440 444 sales@wrekinproducts.com wrekinproducts.com

			COMPARATIVE
WREKIN LOADING CODE	SLOW MOVING WHEEL LOAD (TONNE)	PRODUCT TYPE CODE	FACTA CLASS
ÀN K	0.5	C291	А
← L	1.5	C291	AA
₄ M	2.5	C291	AAA
₩ N	5.0	C291	В
P	6.5	C291	С
×	11.5	C291	D

SPECIFICATION


LOCKING BOLT & LIFTING KEY DETAILS (STANDARD KEYWAY)		STOCK CODE
Locking screws	M8 socket cap	
Unlocking key	6mm hexagon key	
Lifting key	Heavy duty key	KEYSHEAVY



LOCKING BOLT & LIFTING KEY DETAILS (THREADED LIFTING EYES)		STOCK CODE
Locking screws	M8 slotted stainless steel countersunk	
Unlocking key	Flat head screwdriver	
Lifting key	M10 threaded lifting key	KEYS/M10



M10 Threaded Key - KEYS/M10

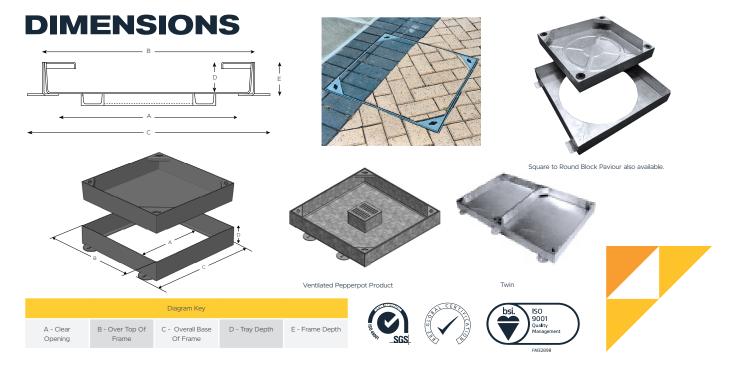



Tel: 01543 440 440 Fax: 01543 440 444