

# RECESSED ACCESS COVER - TRIPLE SEALED

## SPECIFICATIONS



**SCAN  
FOR  
MORE  
INFO**

# RECESSED ACCESS COVERS – TRIPLE SEALED


This range of superior finish recessed covers and frames is designed to accommodate a range of flooring finishes. For areas requiring an aesthetically pleasing finish.

## KEY ATTRIBUTES

- ✓ Four locking screws and 3 neoprene seals offering resistance to gas egress and water / grit ingress.
- ✓ The standard tray depth is nominally 27 mm unless otherwise indicated. Neoprene seals to provide odour egress / water ingress resistance
- ✓ They are ideally suited for indoor use in areas where a superior finish is required.
- ✓ Threaded lifting points protected by cover locking screws
- ✓ Surface seal to prevent grit and debris ingress
- ✓ Manufactured from strong recyclable, corrosion resistant aluminium


## APPLICATIONS

- ▶ Schools
- ▶ Hospitals
- ▶ Pleasure facilities
- ▶ Retail
- ▶ Hotels
- ▶ Kitchens
- ▶ Domestic housing

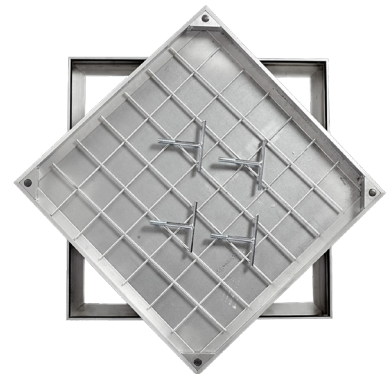

## RECESSED ACCESS COVERS

| WREKIN STOCK CODE | CLEAR OPENING SIZE (C x D mm) | OVERALL FRAME SIZE (A x B mm) | FRAME DEPTH (E mm) | LOAD DUTY | SMWL PNEUMATIC | FACTA CLASS (COMPARABLE) | GLVW    |
|-------------------|-------------------------------|-------------------------------|--------------------|-----------|----------------|--------------------------|---------|
| CALPRO40L/030030  | 300 x 300                     | 390 x 390                     | 40                 | LIGHT     | 1.5 Tonne      | AA                       | 5 Tonne |
| CALPRO40L/045045  | 450 x 450                     | 540 x 540                     | 40                 | LIGHT     | 1.5 Tonne      | AA                       | 5 Tonne |
| CALPRO40L/060045  | 600 x 450                     | 690 x 540                     | 40                 | LIGHT     | 1.5 Tonne      | AA                       | 5 Tonne |
| CALPRO40L/060060  | 600 x 600                     | 690 x 690                     | 40                 | LIGHT     | 1.5 Tonne      | AA                       | 5 Tonne |
| CALPRO40L/067067  | 675 x 675                     | 765 x 765                     | 40                 | LIGHT     | 1.5 Tonne      | AA                       | 5 Tonne |
| CALPRO40L/075060  | 750 x 600                     | 840 x 690                     | 40                 | LIGHT     | 1.5 Tonne      | AA                       | 5 Tonne |
| CALPRO40L/075075  | 750 x 750                     | 840 x 840                     | 40                 | LIGHT     | 1.5 Tonne      | AA                       | 5 Tonne |
| CALPRO40L/090060  | 900 x 600                     | 990 x 690                     | 40                 | LIGHT     | 1.5 Tonne      | AA                       | 5 Tonne |

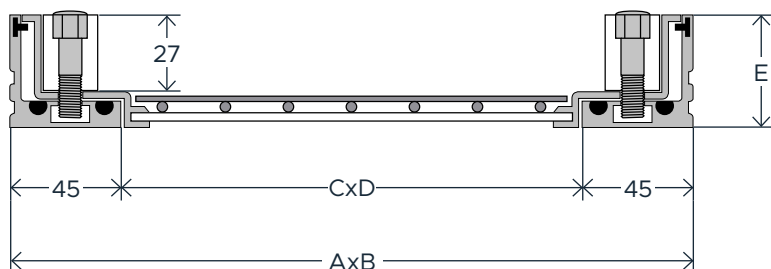

### DIAGRAM KEY

|       |                    |
|-------|--------------------|
| A x B | Overall Frame Size |
| C x D | Clear Opening      |
| E     | Frame Depth        |

## TRIPLE SEALING EXPLAINED:

