

# RECESSED ACCESS COVER - TRIPLE SEALED

## SPECIFICATIONS



**SCAN  
FOR  
MORE  
INFO**

# RECESSED ACCESS COVERS – TRIPLE SEALED


This range of superior finish recessed covers and frames is designed to accommodate a range of flooring finishes. For areas requiring an aesthetically pleasing finish.

### KEY ATTRIBUTES

- ✓ Four locking screws and 3 neoprene seals offering resistance to gas egress and water / grit ingress.
- ✓ The standard tray depth is nominally 60 mm unless otherwise indicated. Neoprene seals to provide odour egress / water ingress resistance
- ✓ They are ideally suited for indoor use in areas where a superior finish is required.
- ✓ Threaded lifting points protected by cover locking screws
- ✓ Surface seal to prevent grit and debris ingress
- ✓ Manufactured from strong recyclable, corrosion resistant aluminium


### APPLICATIONS

- ▶ Schools
- ▶ Hospitals
- ▶ Pleasure facilities
- ▶ Retail
- ▶ Hotels
- ▶ Kitchens
- ▶ Domestic housing

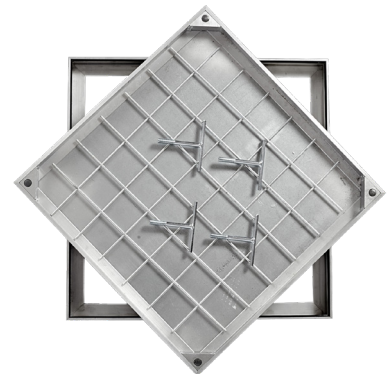

## RECESSED ACCESS COVERS

WREKIN STOCK CODE	CLEAR OPENING SIZE (C x D mm)	OVERALL FRAME SIZE (A x B mm)	FRAME DEPTH (E mm)	LOAD DUTY	SMWL PNEUMATIC	FACTA CLASS (COMPARABLE)	GLVW
CALPRO80N/045045	450 x 450	540 x 540	80	MEDIUM	5 Tonne	B	25 Tonne
CALPRO80N/060045	600 x 450	690 x 540	80	MEDIUM	5 Tonne	B	25 Tonne
CALPRO80N/060060	600 x 600	690 x 690	80	MEDIUM	5 Tonne	B	25 Tonne
CALPRO80N/067067	675 x 675	765 x 765	80	MEDIUM	5 Tonne	B	25 Tonne
CALPRO80N/075060	750 x 600	840 x 690	80	MEDIUM	5 Tonne	B	25 Tonne
CALPRO80N/075075	750 x 750	840 x 840	80	MEDIUM	5 Tonne	B	25 Tonne
CALPRO80N/090060	900 x 600	990 x 690	80	MEDIUM	5 Tonne	B	25 Tonne

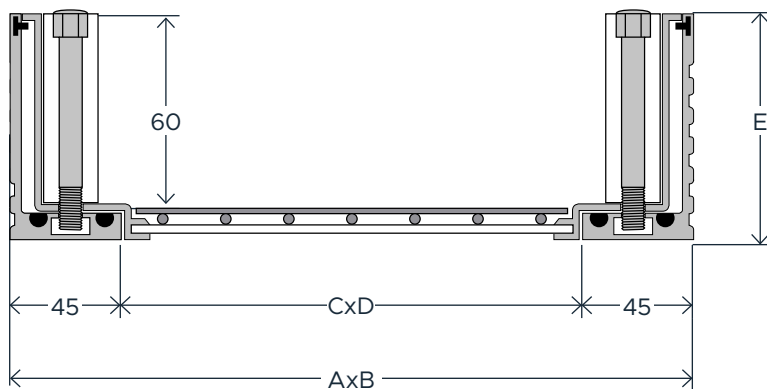

### DIAGRAM KEY

A x B	Overall Frame Size
C x D	Clear Opening
E	Frame Depth

## TRIPLE SEALING EXPLAINED:

