


DMSOB2/7672/KGSF


B125 manhole cover 765mm x 730mm



RANGE	CLEAR OPENING (MM)	OVERALL FRAME (MM)	FRAME DEPTH (MM)
	765 x 730	960 x 875	55

FEATURES

- ✓ 70+ PSRV tested at top surface of chequer by UKAS accredited 3rd party.
- ✓ Safety keyway prevents accidental disengagement of the lifting key during the handling process.
- ✓ Screw locking

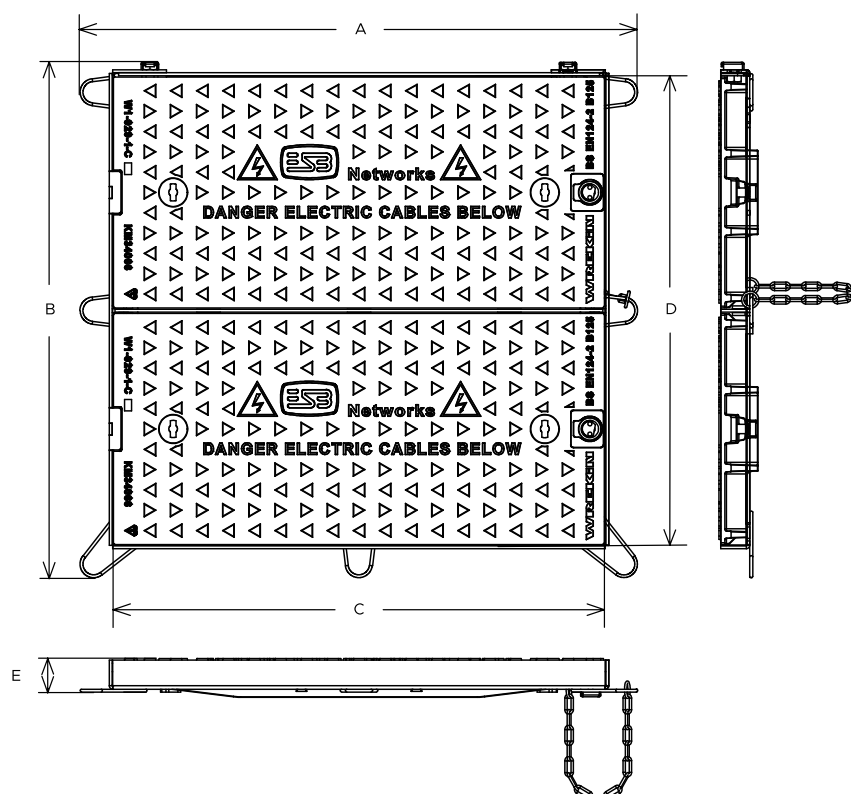

SPECIFICATION

General information

Stock code	DMS0B2/7672/KGSF
Primary material	Ductile iron
Category	Manhole cover
Flanges	4

Standards, classes and groupings

Standards	BS EN 124-2
BS EN 124 Class	B125
Third party certified	Kitemark

Dimensions

Frame shape	Rectangular
Overall frame (A x B)	960 mm x 875 mm
Clear opening (C x D)	765 mm x 730 mm
Frame depth (E)	55mm
Base opening (F x G)	765 mm x 730 mm

NOTES

All values stated are nominal within 2.5% tolerance.

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available on request.
4. All Wrekin products are supplied subject to our [Terms and Conditions of Sale](#)