


DGHOC3/3832/K1

Tristar C250 3 flange gully grate 385mm x 320mm clear opening with 75mm frame depth



CHARACTERISTIC	VALUE
Range	Tristar
Clear opening (mm)	385 x 320
Base opening (mm)	410 x 350
Overall frame (mm)	545 x 425
Frame depth (mm)	75
Waterway area (cm ²)	735
Options	► Screw locking

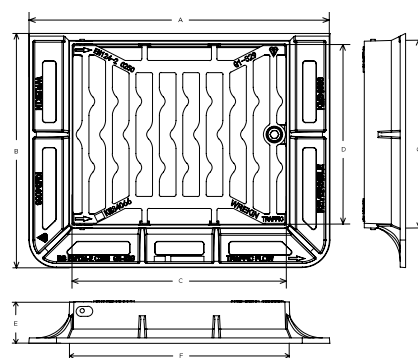

SPECIFICATION

GENERAL INFORMATION

Stock code	DGHOC3/3832/K1
Primary material	Ductile iron
Range	Tristar
Category	Gully grate
Flanges	3

STANDARDS, CLASSES AND GROUPINGS

Standards	BS EN 124-2 CD 526 (formerly HA 102/17)
BS EN 124 Class	C250
BS EN 124 Group	3
Third party certified	Kitemark
CD 526 hydraulic capacity	S

DIMENSIONS

Frame shape	Rectangular
Manhole shape	Rectangular
Overall frame (A x B)	545 mm x 425 mm
Clear opening (C x D)	385 mm x 320 mm
Frame depth (E)	75mm
Base opening (F x G)	410 mm x 350 mm
Waterway area	735cm ²

EPD DATA

Total life cycle (cradle to grave)	48.65 kg CO ₂ equivalent
------------------------------------	-------------------------------------



FEATURES

- ✓ Captive hinges reduce theft risk whilst allowing easy lifting.
- ✓ Reduced apertures provides increased safety for pedestrians and bicycles, over standard gratings.

AVAILABLE OPTIONS

- ✓ **Screw locking**
Screw locking deters unauthorised access to the chamber.
An extended shank socket set is required to engage the locking screw.

ACCESSORIES

STOCK CODE	DESCRIPTION
PC/UNIFORM/151076	Uniform chamber adjustment unit 760mm x 100mm x 15mm
PC/UNIFORM/251076	Uniform chamber adjustment unit 760mm x 100mm x 25mm
PC/UNIWEDGE/755012	Uniform support wedge 120mm x 50mm x 75mm
YPCR/U12.5	12.5Kg Unipak [®] rapid curing polyester resin mortar
YPCR/U25	25Kg Unipak [®] rapid curing polyester resin mortar

- ▶ Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
- ▶ It is the responsibility of all users to satisfy themselves the above data is current.
- ▶ All values stated are nominal within 2.5% tolerance.
- ▶ Installation details are available in the [knowledge base](#).
- ▶ All Wrekin products are supplied subject to our [Terms and Conditions of Sale](#).