

DGH0C3/3832/K1

Tristar C250 3 flange gully grate 385mm x 320mm clear opening with 75mm frame depth




RANGE	CLEAR OPENING (MM)	BASE OPENING (MM)	OVERALL FRAME (MM)	FRAME DEPTH (MM)	WATERWAY AREA (CM ²)	OPTIONS
Tristar	385 x 320	410 x 350	545 x 425	75	735	<input type="checkbox"/> Screw locking

FEATURES

✓ Captive hinges reduce theft risk whilst allowing easy lifting.

✓ Reduced apertures provides increased safety for pedestrians and bicycles, over standard gratings.

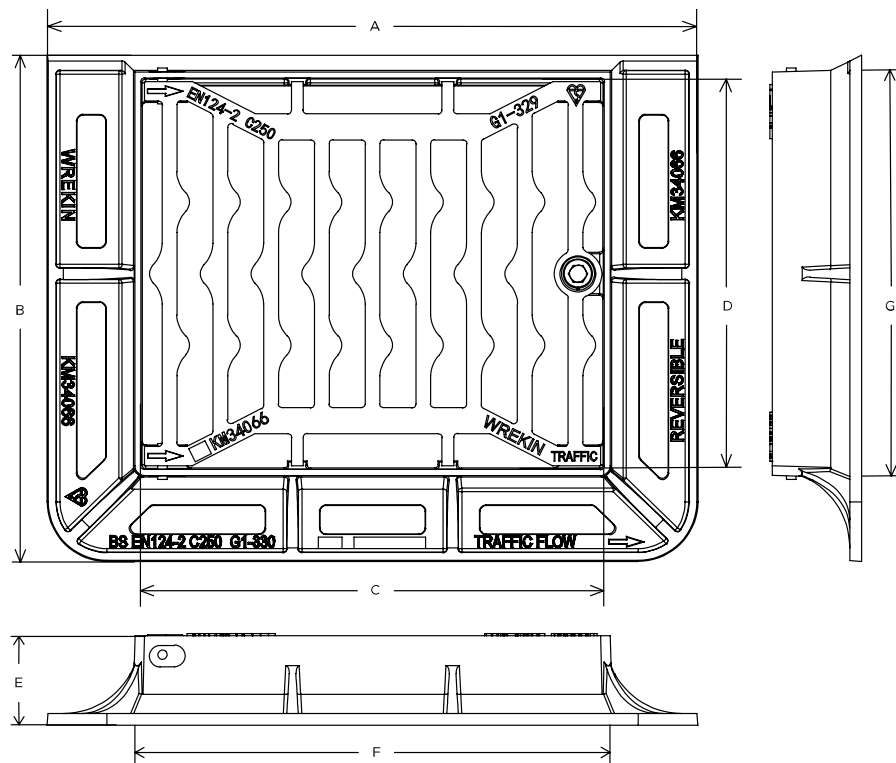

SPECIFICATION

General information

Stock code	DGH0C3/3832/K1
Primary material	Ductile iron
Range	Tristar
Category	Gully grate
Flanges	3

Standards, classes and groupings

Standards	BS EN 124-2 CD 526 (formerly HA 102/17)
BS EN 124 Class	C250
BS EN 124 Group	3
Third party certified	Kitemark
CD 526 hydraulic capacity	S

Dimensions

Frame shape	Rectangular
Manhole shape	Rectangular
Overall frame (A x B)	545 mm x 425 mm
Clear opening (C x D)	385 mm x 320 mm
Frame depth (E)	75mm
Base opening (F x G)	410 mm x 350 mm
Waterway area	735cm ²

AVAILABLE OPTIONS

✓ Screw locking

Screw locking deters unauthorised access to the chamber. An extended shank socket set is required to engage the locking screw.

ACCESSORIES

STOCK CODE	DESCRIPTION
PC/UNIFORM/151076	Uniform chamber adjustment unit 760mm x 100mm x 15mm
PC/UNIFORM/251076	Uniform chamber adjustment unit 760mm x 100mm x 25mm
PC/UNIWEDGE/755012	Uniform support wedge 120mm x 50mm x 75mm
YPCR/U12.5	12.5Kg Unipak [®] rapid curing polyester resin mortar
YPCR/U25	25Kg Unipak [®] rapid curing polyester resin mortar

NOTES

All values stated are nominal within 2.5% tolerance.

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available in the [knowledge base](#).
4. All Wrekin products are supplied subject to our [Terms and Conditions of Sale](#)

